
FEICHUN SPECIAL CABLES
Website Address www.feichuncables.com
Whatsapp Account +86 138 5608 5607 & +86 138 5512 3218
Email Address ziyu.huang@feichuncables.com & zihao.yang@feichuncables.com

FeiChun Cable H07RN-F Harmonized Rubber Cable

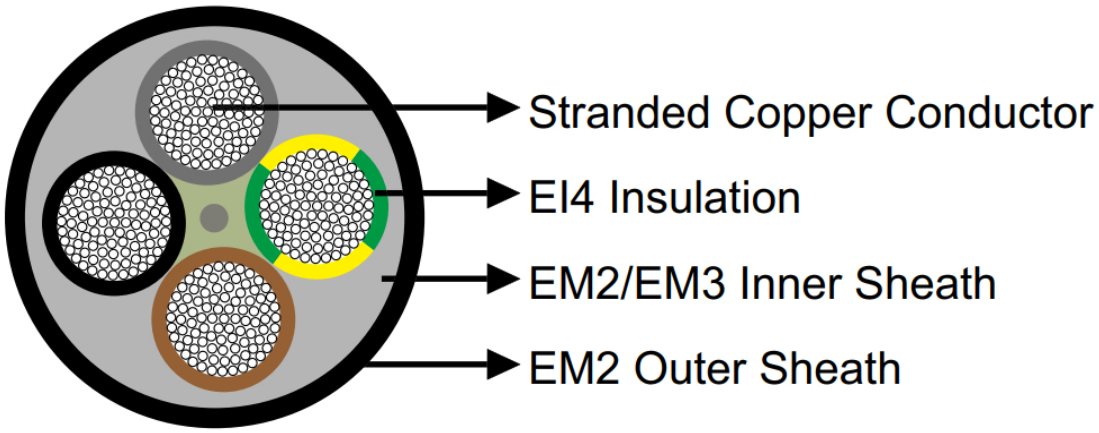

Technical Specifications

Application

These cables are designed for the connection of heating units, industrial tools, mobile equipment and machines, e.g. vulcanisation plates, hand-operated equipment, transportable motors etc., under normal mechanical loads in dry and damp areas, outdoors and in explosion hazard areas, as well as in industrial and agricultural applications and on building sites.

Standards

DIN VDE 0282 Part1 and Part 4

HD 22.1

HD 22.4

Characteristics

Conductors:

Stranded copper conductor, class 5 according to DIN VDE 0295/HD 383 S2.

Insulation:

Rubber type EI4 according to DIN VDE 0282 Part 1/HD 22.1.

Inner Sheath:

(for ≥ 10 mm² or more than 5 cores): NR/SBR rubber type EM1.

Outer Sheath:

CR/PCP rubber type EM2.

Website Address www.feichuncables.com
Whatsapp Account +86 138 5608 5607 & +86 138 5512 3218
Email Address ziyu.huang@feichuncables.com & zihao.yang@feichuncables.com

Specifications

H07RN-F 12G1,5

This cable comprises a 12x1.5 mm² core. The Minimium Overall Diameter is a proximately 17.60 mm, and the Maximum Overall Diameter is 20.50 mm. The total weight is around 515 kg/km.

H07RN-F 19G1,5

This cable comprises a 19x1.5 mm² core. The Minimium Overall Diameter is a proximately 20.70 mm, and the Maximum Overall Diameter is 26.30 mm. The total weight is around 795 kg/km.