FEICHUN SPECIAL CABLES · FC®

TECHNICAL DATA SHEET | Spreader · Festoon · 0.6/1 kV | Items PC-01 – PC-14

Singapore RFQ

Spreader Reel & Festoon Power Cables for Container Cranes

FC-CFX™ SPR-V & FC-FLX™ RND-X Series

Equivalent offers to CORDAFLEX (SMK)-V, SPD(RE)-FHNCT, SPREADERFLEX REEL XPRT and RONDOFLEX (FC) XPRT — rubber-insulated, rubber-sheathed cables for spreader reels at 180 m/min and festoon trolleys at 270 m/min, supplied on wooden drums with factory test certificates.

Doc No. FC-TDS-PWR-2026-S3P8 Rev. 0 Issue date 14 Oct 2026 Origin China

HS code 8544.49

01 Scope & Item Cross-Reference

This data sheet covers the fourteen spreader and festoon power/control cables in the buyer's RFQ. Each offer is labelled with the buyer's Item Ref. per Commercial Instruction (5). Companion document for the fibre optic items: FC-TDS-FOF-2026-S3F7.

No.	Item Ref.	Specified / Reference Type	FeiChun Offer	Drum length	Drums	Total
1	**PC-01**	Spreader reel cable 0.6/1 kV 44C × 2.5 mm² · CORDAFLEX (SMK)-V / SPD(RE)-FHNCT / WS-RLIN-V / SPREADERFLEX REEL XPRT or equivalent	**FC-CFX™ SPR-V (N)SHTÖU 44G2.5**	93 m	9	837 m
2	**PC-02**	Spreader vertical reel cable 0.6/1 kV 44 × 2.5 mm² · SPD(RE)-FHNCT / CORDAFLEX (SMK)-V or equivalent	**FC-CFX™ SPR-V (N)SHTÖU 44G2.5**	100 m	23	2,300 m
3	**PC-03**	Festoon cable 0.6/1 kV 24C × 2.5 mm² · RONDOFLEX XPRT, SAP 20003577 · 5DG6674 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU-J 24G2.5**	182 m	1	182 m
4	**PC-04**	Festoon cable 0.6/1 kV 24C × 2.5 mm² · RONDOFLEX XPRT, SAP 20003577 · 5DG6674 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU-J 24G2.5**	212 m	1	212 m
5	**PC-05**	Festoon cable 0.6/1 kV 30C × 2.5 mm² · RONDOFLEX XPRT, SAP 20003578 · 5DG6675 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU-J 30G2.5**	208 m	1	208 m
6	**PC-06**	Festoon cable 0.6/1 kV 4C × 4 mm² · RONDOFLEX XPRT, SAP 20003550 · 5DG6642 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU-J 4G4**	212 m	1	212 m
7	**PC-07**	Festoon cable 0.6/1 kV 4C × 10 mm², screened · RONDOFLEX FC XPRT, SAP 20003585 · 5DG6684 or equivalent	**FC-FLX™ RND-XC (N)GRDGCGÖU-J 4G10**	208 m	1	208 m
8	**PC-08**	Festoon cable 0.6/1 kV 4C × 16 mm² · RONDOFLEX XPRT, SAP 20003553 · 5DG6645 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU-J 4G16**	212 m	1	212 m
9	**PC-09**	Festoon cable 0.6/1 kV 3C × 16 + 3C × 2.5 mm², screened · RONDOFLEX FC XPRT, SAP 20003586 · 5DG6685 or equivalent	**FC-FLX™ RND-XC (N)GRDGCGÖU-J 3x16+3G2.5/3**	208 m	1	208 m
10	**PC-10**	Festoon cable 0.6/1 kV 4C × 25 mm² · RONDOFLEX XPRT, SAP 20003554 · 5DG6646 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU-J 4G25**	212 m	1	212 m
11	**PC-11**	Festoon cable 0.6/1 kV 5C × 25 mm² · RONDOFLEX XPRT, SAP 20003563 · 5DG6656 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU-J 5G25**	208 m	1	208 m

No.	Item Ref.	Specified / Reference Type	FeiChun Offer	Drum length	Drums	Total
12	**PC-12**	Festoon cable 0.6/1 kV 1C × 35 mm² · RONDOFLEX XPRT, SAP 20003533 · 5DG6611 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU-J 1x35**	212 m	1	212 m
13	**PC-13**	Festoon cable 0.6/1 kV 5C × 35 mm² · RONDOFLEX XPRT, SAP 20003564 · 5DG6657 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU-J 5G35**	208 m	1	208 m
14	**PC-14**	Festoon cable 0.6/1 kV 6 pairs × (2C × 1 mm²), control · RONDOFLEX XPRT, SAP 20003594 · 5DG6694 or equivalent	**FC-FLX™ RND-X (N)GRDGÖU 6x2x1**	212 m	1	212 m
				Total supply	**44 drums**	**5,631 m**

RATED VOLTAGE
0.6/1 kV
AC test 3.5 kV · 5 min

SPREADER REEL
7,000 N
Aramid strength member · 180 m/min

FESTOON TRAVEL
270 m/min
Short-lay EPR/PCP design

CONDUCTOR TEMP.
90 °C
Short circuit 250 °C

02 FC-CFX™ SPR-V (N)SHTÖU 44G2.5 — Items PC-01 & PC-02

TYPE A FC-CFX™ SPR-V (N)SHTÖU 44G2.5

PC-01 · PC-02 · ≡ CORDAFLEX (SMK)-V / SPD(RE)-FHNCT

Heavy-duty spreader cable for vertical and monospiral spreader reels on STS and RTG cranes. Forty-four cores are laid in three short-lay layers around a central aramid strength member that carries the hanging load, while a polyester anti-torsion braid between the two rubber sheaths keeps the cable torsionally stable during fast hoisting. A single design is offered for both items: it meets the tighter PC-02 diameter window (36 – 37.8 mm) and the higher PC-02 tensile requirement (7,000 N), and therefore exceeds PC-01.

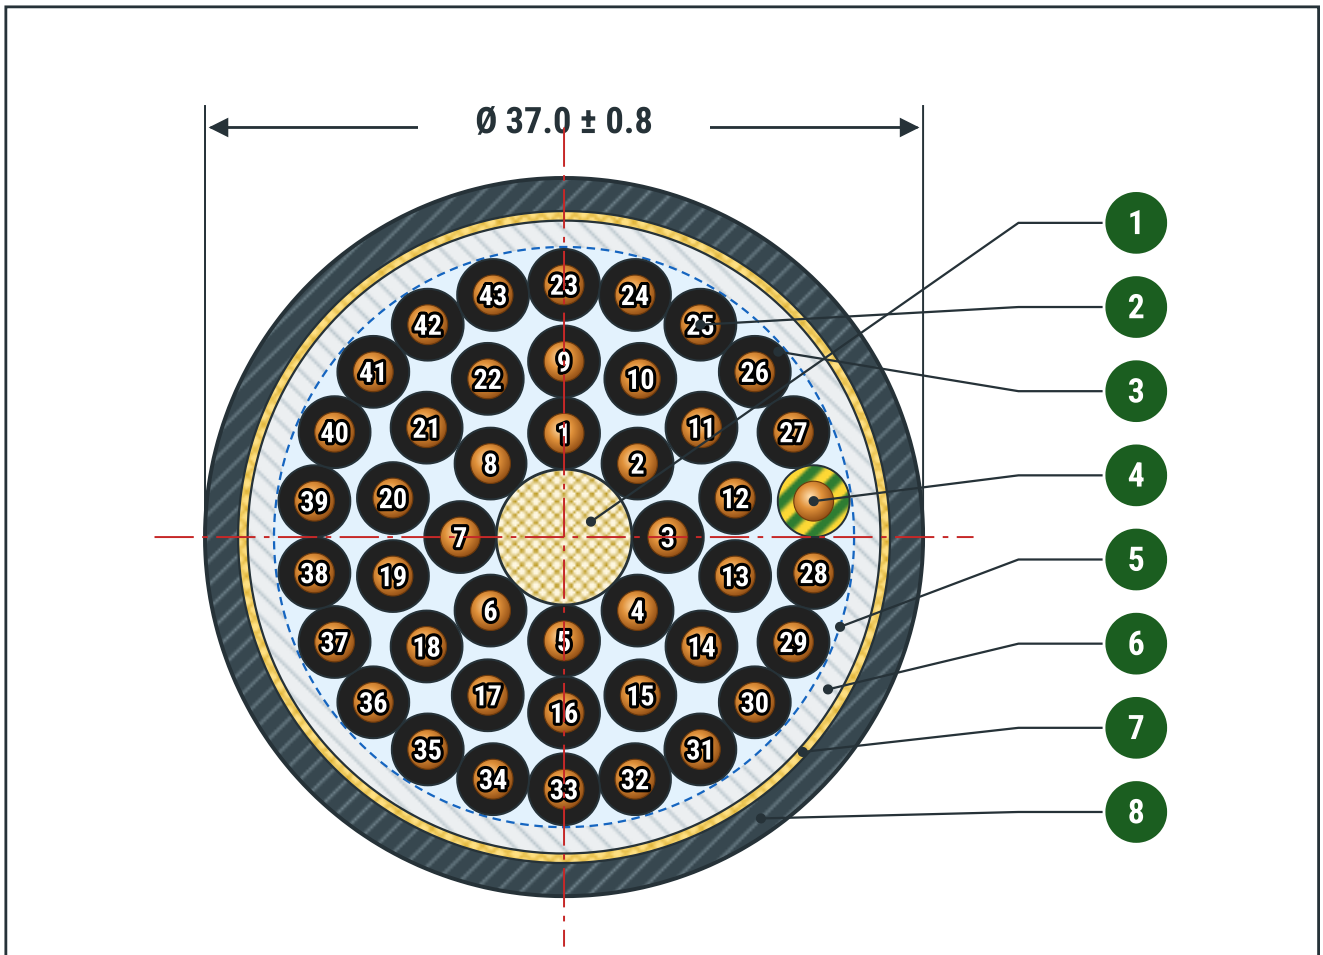


FIG. 1 — FC-CFX™ SPR-V (N)SHTÖU 44G2.5 · ITEMS PC-01 / PC-02

DOC NO. FC-TDS-PWR-2026-S3P8	REV. 0 · SCALE NTS (≈ 7:1)
PROJECTION: 1st ANGLE · SECTION A–A	DIMENSIONS IN mm · FEICHUN CABLES

Pos.	Element	Material / Detail
1	Central strength member	Aramid core, PE-sheathed, Ø 7.0 mm — rated ≥ 7,000 N
2	Conductor	Tinned copper, extra-fine wire class 6 (IEC 60228), 2.5 mm²
3	Insulation	EPR rubber 3GI3, black with white numerals 1 – 43
4	Protective conductor	Green/yellow core, 2.5 mm²
5	Core assembly	3 layers (8 + 14 + 22), short-lay, PETP separator tape
6	Inner sheath	Special rubber compound 5GM3
7	Anti-torsion braid	High-tenacity polyester braid
8	Outer sheath	PCP rubber 5GM5, black, Ø 37.0 ± 0.8 mm

Core identification: black insulation with white numerals 1 – 43 printed every 50 mm (DIN VDE 0293-334), plus one green/yellow protective conductor.

Technical data — FC-CFX™ SPR-V (N)SHTÖU 44G2.5

Construction & electrical	
Cores × cross-section	44G2.5 mm² (43 + G/Y)
Conductor	Tinned copper, class 6 (IEC 60228)
Conductor resistance at 20 °C	≤ 8.21 Ω/km (tinned)
Rated voltage U_0/U	0.6/1 kV
Test voltage	3.5 kV AC, 5 min
Outer diameter	**37.0 ± 0.8 mm**
Cable weight	approx. 1,950 kg/km
Sheath colour	Black (yellow on request)

Mechanical & operating	
Permissible tensile load	**7,000 N** (via central strength member)
Hoisting speed	**180 m/min** (design rating 240 m/min)
Min. bending radius	Reeling 5 × D (185 mm) · guide rollers 7.5 × D
Torsional stress	± 25 °/m
Max. conductor temperature	90 °C operating · 250 °C short circuit
Ambient temperature	Flexing −25 … +80 °C · Fixed −40 … +80 °C
Flame retardance	IEC 60332-1-2
Resistance	Oil, ozone, UV, salt-laden marine atmosphere

03 FC-FLX™ RND-X / RND-XC Festoon Cables — Items PC-03 to PC-14

TYPE B

FC-FLX™ RND-X (N)GRDGÖU-J · RND-XC (N)GRDGCGÖU-J

PC-03 … PC-14 · ≡ RONDOFLEX (FC) XPRT

Round festoon cables for crane trolley festoon systems. Fine-stranded copper conductors with EPR insulation are laid up with a short lay, and the interstices are filled with the PCP outer sheath compound, giving a compact, kink-free cable for high travel speeds. Screened versions (RND-XC) carry a tinned copper braid between inner and outer sheaths for EMC compliance on VFD-fed motors.

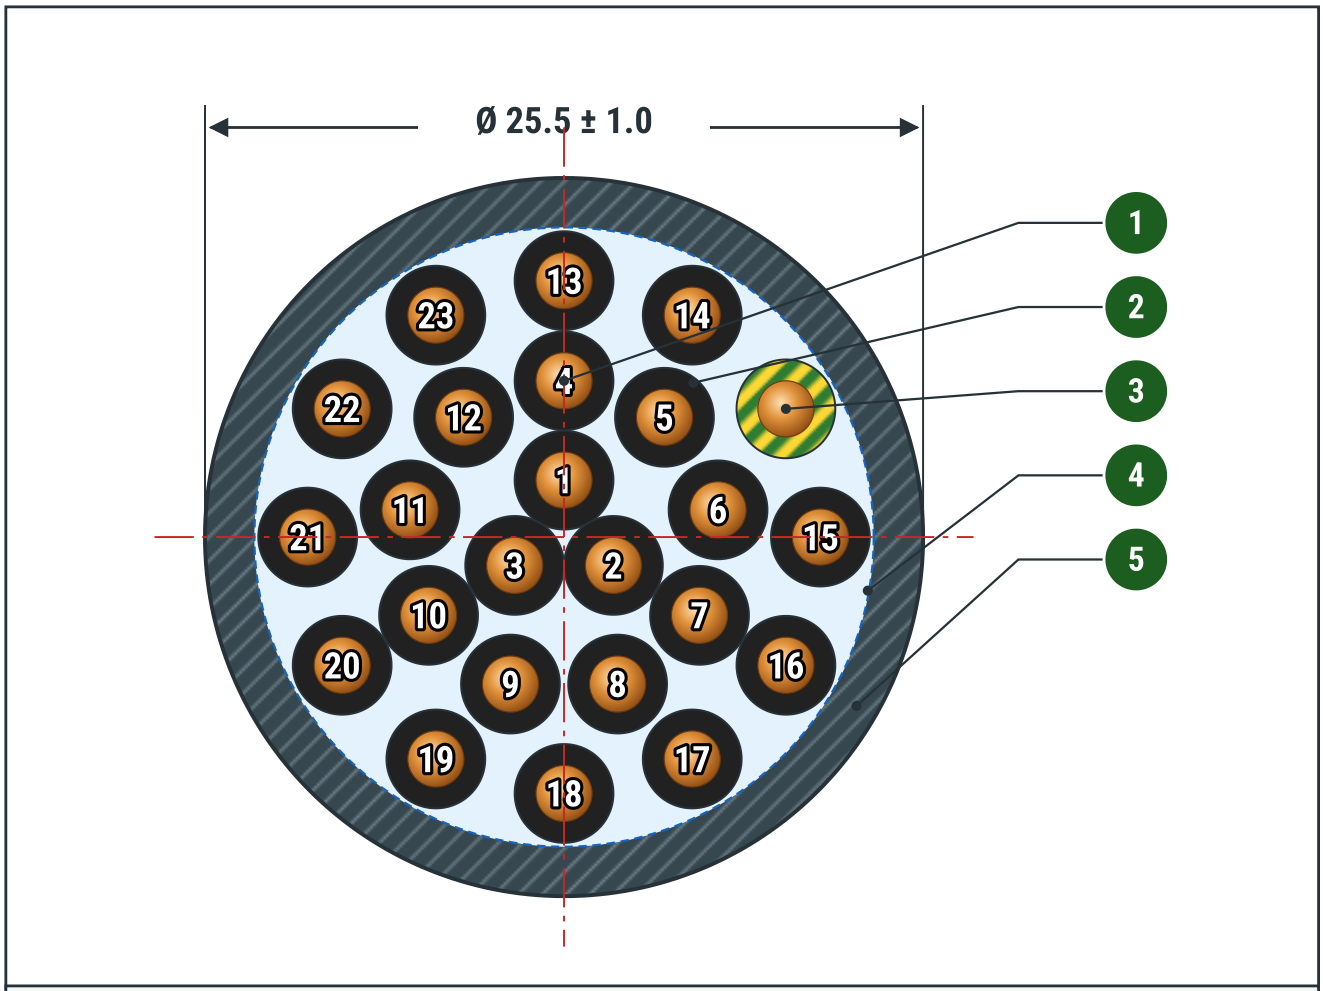


FIG. 2 — FC-FLX™ RND-X (N)GRDGÖU-J 24G2.5 · ITEMS PC-03 / PC-04

DOC NO. FC-TDS-PWR-2026-S3P8	REV. 0 · SCALE NTS (≈ 10:1)
PROJECTION: 1st ANGLE · SECTION B–B	DIMENSIONS IN mm · FEICHUN CABLES

Pos.	Element	Material / Detail
1	Conductor	Plain copper, fine wire class 5 (IEC 60228), 2.5 mm²
2	Insulation	EPR rubber 3GI3, black with white numerals 1 – 23
3	Protective conductor	Green/yellow core, 2.5 mm² (-J version)
4	Core assembly	3 + 9 + 12, short lay, interstices filled, PETP tape
5	Outer sheath	PCP rubber 5GM5, black, festoon-grade, extruded into interstices

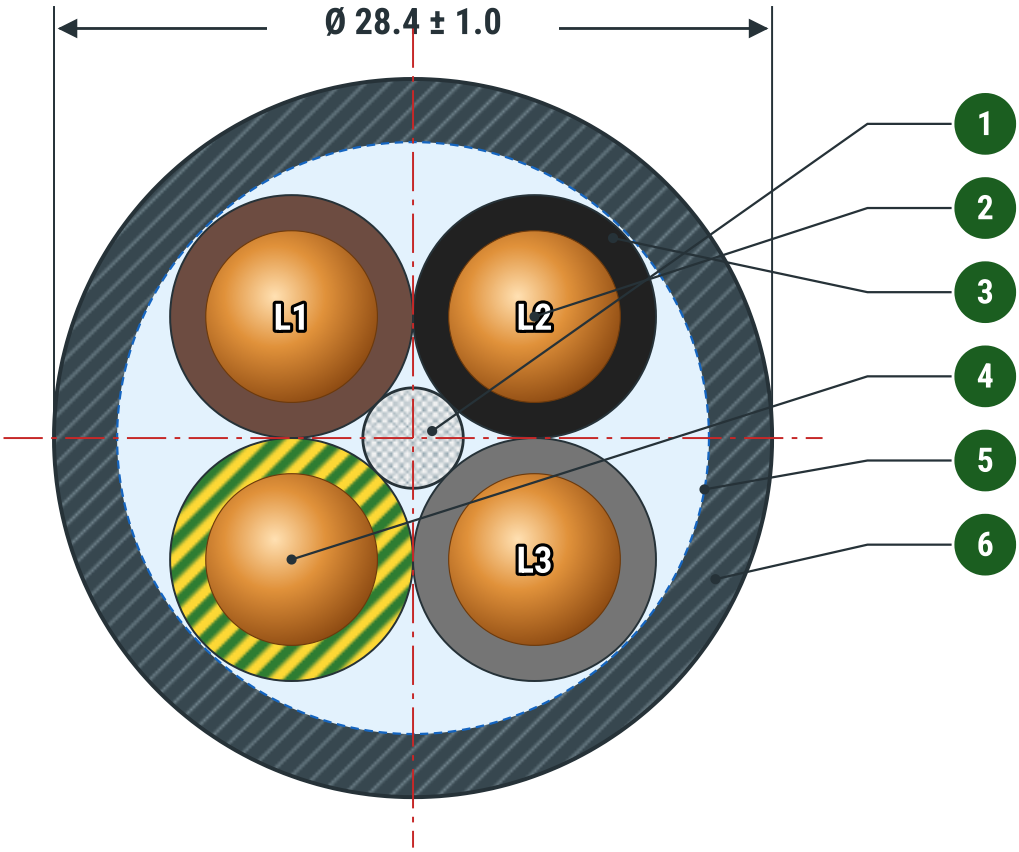


FIG. 3 — FC-FLX™ RND-X (N)GRDGÖU-J 4G25 · ITEM PC-10 (TYPICAL 4/5-CORE)

DOC NO. FC-TDS-PWR-2026-S3P8	REV. 0 · SCALE NTS (≈ 9:1)
PROJECTION: 1st ANGLE · SECTION C–C	DIMENSIONS IN mm · FEICHUN CABLES

Pos.	Element	Material / Detail
1	Centre filler	Rubber filler cord
2	Conductor	Plain copper, fine wire class 5, 25 mm²
3	Insulation	EPR 3GI3 — brown / black / grey (VDE colour code)
4	Protective conductor	Green/yellow core, 25 mm²
5	Separator	PETP tape over core assembly
6	Outer sheath	PCP rubber 5GM5, black, festoon-grade

Core colours: up to 5 cores — brown / black / grey / blue + green/yellow (HD 308 S2). Multicore ≥ 7 cores — black with white numerals + green/yellow. PC-14 — numbered pairs.

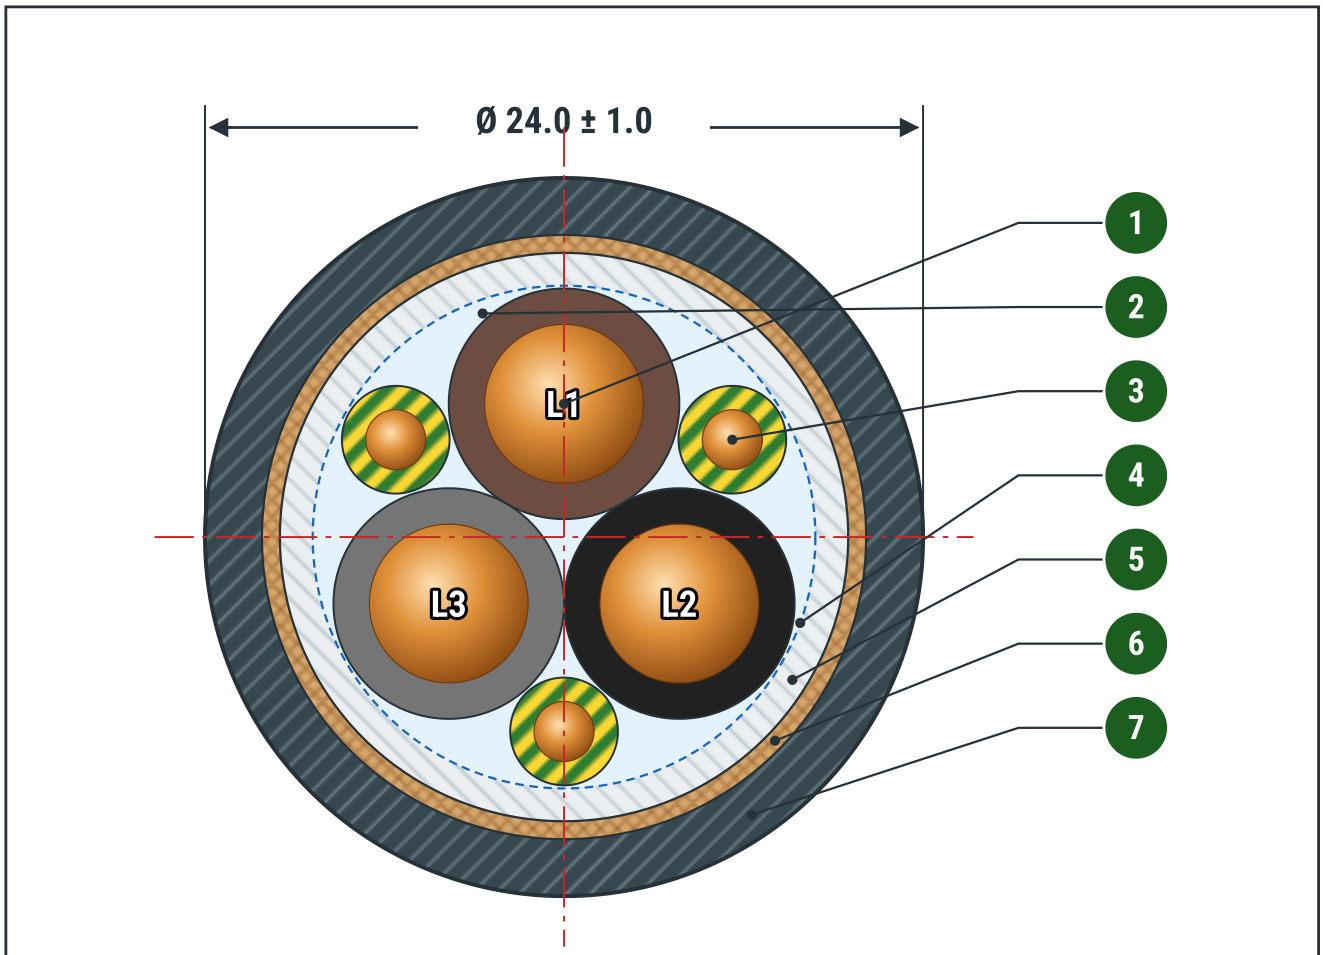


FIG. 4 — FC-FLX™ RND-XC (N)GRDGCGÖU-J 3x16+3G2.5/3 · ITEM PC-09

DOC NO. FC-TDS-PWR-2026-S3P8	REV. 0 · SCALE NTS (≈ 11:1)
PROJECTION: 1st ANGLE · SECTION D–D	DIMENSIONS IN mm · FEICHUN CABLES

Pos.	Element	Material / Detail
1	Phase conductor	Plain copper, fine wire class 5, 16 mm²
2	Insulation	EPR 3GI3 — brown / black / grey
3	Protective conductor	3 × 2.5 mm² G/Y, split and placed symmetrically in the outer interstices (EMC design)
4	Separator	PETP tape
5	Inner sheath	Rubber 5GM3
6	Screen	Tinned copper wire braid, optical coverage ≥ 85 %
7	Outer sheath	PCP rubber 5GM5, black, Ø 24.0 ± 1.0 mm

PC-07 (4G10, screened) uses the same RND-XC build-up: four cores (L1/L2/L3 + G/Y) under inner sheath, tinned copper braid and PCP outer sheath.

Dimensional, electrical & mechanical data per item

Item	FeiChun Type	Screen	OD (mm)	Weight (kg/km)	Perm. tensile (N)	Min. bend radius (mm)	R_{20} max (Ω/km)	Speed (m/min)
PC-03	FC-FLX™ RND-X (N)GRDGÖU-J 24G2.5	–	25.5 ± 1.0	≈ 1,120	900	128	7.98	270
PC-04	FC-FLX™ RND-X (N)GRDGÖU-J 24G2.5	–	25.5 ± 1.0	≈ 1,120	900	128	7.98	270
PC-05	FC-FLX™ RND-X (N)GRDGÖU-J 30G2.5	–	27.8 ± 1.0	≈ 1,340	1,125	139	7.98	270
PC-06	FC-FLX™ RND-X (N)GRDGÖU-J 4G4	–	14.4 ± 0.6	≈ 345	240	72	4.95	270
PC-07	FC-FLX™ RND-XC (N)GRDGCGÖU-J 4G10	Cu braid	21.3 ± 1.0	≈ 875	600	106	1.91	270
PC-08	FC-FLX™ RND-X (N)GRDGÖU-J 4G16	–	24.3 ± 0.8	≈ 1,095	960	122	1.21	270
PC-09	FC-FLX™ RND-XC (N)GRDGCGÖU-J 3x16+3G2.5/3	Cu braid	24.0 ± 1.0	≈ 1,135	720	120	1.21 / 7.98	270
PC-10	FC-FLX™ RND-X (N)GRDGÖU-J 4G25	–	28.4 ± 1.0	≈ 1,590	1,500	142	0.780	270
PC-11	FC-FLX™ RND-X (N)GRDGÖU-J 5G25	–	31.4 ± 1.0	≈ 1,965	1,875	157	0.780	270
PC-12	FC-FLX™ RND-X (N)GRDGÖU-J 1x35	–	13.1 ± 0.6	≈ 425	525	66	0.554	270
PC-13	FC-FLX™ RND-X (N)GRDGÖU-J 5G35	–	36.2 ± 1.0	≈ 2,670	2,625	181	0.554	270
PC-14	FC-FLX™ RND-X (N)GRDGÖU 6x2x1	–	15.5 ± 0.8	≈ 330	180	78	19.5	270

Common characteristics — festoon series

Electrical	
Conductor	Plain copper, fine wire class 5 (IEC 60228)
Insulation	EPR rubber 3GI3 (DIN VDE 0207-20)
Rated voltage U_0/U	0.6/1 kV (PC-14 control: 300/500 V min., tested at 3.5 kV)
Test voltage	3.5 kV AC, 5 min
Max. conductor temperature	90 °C · short circuit 250 °C
Screen (RND-XC)	Tinned Cu braid ≥ 85 % coverage, transfer impedance ≤ 250 mΩ/m @ 30 MHz

Mechanical & environmental	
Trolley travel speed	**270 m/min**
Permissible tensile load	15 N/mm² of total copper cross-section
Min. bending radius	Festoon 5 × D
Outer sheath	PCP rubber 5GM5 (DIN VDE 0207-21), black
Ambient temperature	Flexing −25 … +80 °C · Fixed −40 … +80 °C
Flame / oil / UV	IEC 60332-1-2 · EN 60811-404 · UV & ozone resistant

04 Compliance Matrix against RFQ Parameters

Statement of compliance per Commercial Instruction (7). "Exceeds" denotes a value better than the specified requirement. Bending radius and tensile values are offered at or below the RFQ limits, so the cables operate within the buyer's festoon system design.

Item	Parameter	RFQ requirement	FeiChun offer	Status	Remarks
PC-01 / PC-02 · FC-CFX™ SPR-V (N)SHTÖU 44G2.5					
PC-01	Outer diameter	33.1 – 38.8 mm	37.0 ± 0.8 mm	Comply	
PC-01	Weight	1,980 kg/km	≈ 1,950 kg/km	Comply	
PC-01	Hoisting speed	180 m/min	180 m/min (design rating 240 m/min)	Exceeds	
PC-01	Permissible tensile strength	5,100 N (min.)	7,000 N	Exceeds	
PC-02	Outer diameter	36 – 37.8 mm	37.0 ± 0.8 mm	Comply	
PC-02	Weight	1,980 kg/km	≈ 1,950 kg/km	Comply	
PC-02	Hoisting speed	180 m/min	180 m/min (design rating 240 m/min)	Exceeds	
PC-02	Permissible tensile strength	7,000 N (min.)	7,000 N	Comply	
PC-02	Split delivery 8 / 7 / 8 drums	7 drums by 1 Feb 2027 · 8 drums by 1 Apr 2027	Accepted	Comply	
PC-03 – PC-14 · FC-FLX™ RND-X / RND-XC festoon cables (trolley travel speed 270 m/min — comply for all items)					
PC-03	OD / weight	24 – 27 mm · 1,140 kg/km	25.5 ± 1.0 mm · ≈ 1,120 kg/km	Comply	
PC-03	Tensile (max.) / bending radius (min.)	900 N · 135 mm	900 N · 128 mm	Comply	
PC-04	OD / weight	24 – 27 mm · 1,140 kg/km	25.5 ± 1.0 mm · ≈ 1,120 kg/km	Comply	
PC-04	Tensile (max.) / bending radius (min.)	900 N · 135 mm	900 N · 128 mm	Comply	
PC-05	OD / weight	26.4 – 29.4 mm · 1,360 kg/km	27.8 ± 1.0 mm · ≈ 1,340 kg/km	Comply	
PC-05	Tensile (max.) / bending radius (min.)	1,120 N · 147 mm	1,125 N · 139 mm	Comply	

Item	Parameter	RFQ requirement	FeiChun offer	Status	Remarks
PC-06	OD / weight	13.6 – 15.2 mm · 350 kg/km	14.4 ± 0.6 mm · ≈ 345 kg/km	Comply	
PC-06	Tensile (max.) / bending radius (min.)	240 N · 76 mm	240 N · 72 mm	Comply	
PC-07	OD / weight	19.6 – 22.6 mm · 890 kg/km	21.3 ± 1.0 mm · ≈ 875 kg/km	Comply	
PC-07	Tensile (max.) / bending radius (min.)	600 N · 113 mm	600 N · 106 mm	Comply	
PC-08	OD / weight	23.3 – 25.3 mm · 1,110 kg/km	24.3 ± 0.8 mm · ≈ 1,095 kg/km	Comply	
PC-08	Tensile (max.) / bending radius (min.)	960 N · 127 mm	960 N · 122 mm	Comply	
PC-09	OD / weight	22.4 – 25.4 mm · 1,150 kg/km	24.0 ± 1.0 mm · ≈ 1,135 kg/km	Comply	
PC-09	Tensile (max.) / bending radius (min.)	720 N · 127 mm	720 N · 120 mm	Comply	
PC-10	OD / weight	26.9 – 29.9 mm · 1,610 kg/km	28.4 ± 1.0 mm · ≈ 1,590 kg/km	Comply	
PC-10	Tensile (max.) / bending radius (min.)	1,500 N · 150 mm	1,500 N · 142 mm	Comply	
PC-11	OD / weight	29.9 – 32.9 mm · 1,990 kg/km	31.4 ± 1.0 mm · ≈ 1,965 kg/km	Comply	
PC-11	Tensile (max.) / bending radius (min.)	1,870 N · 165 mm	1,875 N · 157 mm	Comply	
PC-12	OD / weight	12.3 – 13.9 mm · 430 kg/km	13.1 ± 0.6 mm · ≈ 425 kg/km	Comply	
PC-12	Tensile (max.) / bending radius (min.)	520 N · 70 mm	525 N · 66 mm	Comply	
PC-13	OD / weight	34.7 – 37.7 mm · 2,700 kg/km	36.2 ± 1.0 mm · ≈ 2,670 kg/km	Comply	
PC-13	Tensile (max.) / bending radius (min.)	2,620 N · 189 mm	2,625 N · 181 mm	Comply	

Item	Parameter	RFQ requirement	FeiChun offer	Status	Remarks
PC-14	OD / weight	27.2 – 30.2 mm · 1,280 kg/km	15.5 ± 0.8 mm · ≈ 330 kg/km	Remark	See remark below
PC-14	Tensile (max.) / bending radius (min.)	180 N · 151 mm	180 N · 78 mm	Comply	

Remark PC-14 (6 pairs × 2 × 1 mm²): the RFQ tensile limit (180 N = 12 × 1 mm² × 15 N/mm²) corresponds to a 12-core 1 mm² cable, whose natural diameter is about 15 – 16 mm and weight about 330 kg/km. The listed 27.2 – 30.2 mm and 1,280 kg/km match a much larger construction. If the festoon saddles or clamps require the larger diameter, FeiChun can supply PC-14 with a build-up sheath to 28.7 ± 1.0 mm at no change to the electrical design. Please confirm the preferred option.

05 Testing, Standards & Certification

Routine test (every drum)	Method
Conductor resistance	IEC 60228 / IEC 60468
AC voltage test 3.5 kV, 5 min	IEC 60245-2 / DIN VDE 0250
Insulation resistance	IEC 60245-2
Dimensions (OD, insulation, sheath)	IEC 60811-201/202/203
Core identification & marking	DIN VDE 0293-334 / HD 308 S2

Type test (design qualification)	Method
Mechanical properties, ageing	IEC 60811-501 / -401
Hot set (EPR)	IEC 60811-507
Oil resistance	IEC 60811-404
Ozone resistance	IEC 60811-403
Flame propagation	IEC 60332-1-2
Festoon / reeling endurance	FeiChun in-house test rig

Each drum is supplied with a **manufacturer's test certificate** stating the buyer's Item Ref. FeiChun product certifications include CE, UKCA, VDE, EAC, ATEX and IECEx.

06 Marking, Packing & Logistics Data

Sheath marking (embossed / ink-jet, every 1 m)	
Example PC-10	`FEICHUN FC-FLX RND-X (N)GRDGÖU-J 4G25 0.6/1kV PC-10 2026 0001m`
Example PC-02	`FEICHUN FC-CFX SPR-V (N)SHTÖU 44G2.5 0.6/1kV PC-02 2026 0001m`

Drum packing	
Drum type	Fumigated wooden drum (ISPM 15), battened
Cable ends	Rubber end caps, inner end accessible for testing
Drum label	Item Ref., type, length, gross/net weight, drum no.
Length tolerance	0 / +1 % per drum
PC-02 delivery split	8 drums per quoted lead time · 7 drums by 1 Feb 2027 · 8 drums by 1 Apr 2027 — accepted

Item logistics summary (drum sizes and weights approximate)

Item	Type	Length / drum	Drums	Drum Ø × W (mm)	Net cable / drum (kg)	Gross / drum (kg)	HS code	Origin
PC-01	FC-CFX™ SPR-V 44G2.5	93 m	9	1400 × 850	≈ 181	≈ 326	8544.49	China
PC-02	FC-CFX™ SPR-V 44G2.5	100 m	23	1400 × 850	≈ 195	≈ 340	8544.49	China
PC-03	RND-X (N)GRDGÖU-J 24G2.5	182 m	1	1100 × 700	≈ 204	≈ 289	8544.49	China
PC-04	RND-X (N)GRDGÖU-J 24G2.5	212 m	1	1100 × 700	≈ 237	≈ 322	8544.49	China
PC-05	RND-X (N)GRDGÖU-J 30G2.5	208 m	1	1250 × 750	≈ 279	≈ 389	8544.49	China
PC-06	RND-X (N)GRDGÖU-J 4G4	212 m	1	900 × 600	≈ 73	≈ 128	8544.49	China
PC-07	RND-XC (N)GRDGCGÖU-J 4G10	208 m	1	1100 × 700	≈ 182	≈ 267	8544.49	China
PC-08	RND-X (N)GRDGÖU-J 4G16	212 m	1	1100 × 700	≈ 232	≈ 317	8544.49	China
PC-09	RND-XC (N)GRDGCGÖU-J 3x16+3G2.5/3	208 m	1	1100 × 700	≈ 236	≈ 321	8544.49	China
PC-10	RND-X (N)GRDGÖU-J 4G25	212 m	1	1250 × 750	≈ 337	≈ 447	8544.49	China
PC-11	RND-X (N)GRDGÖU-J 5G25	208 m	1	1250 × 750	≈ 409	≈ 519	8544.49	China
PC-12	RND-X (N)GRDGÖU-J 1x35	212 m	1	900 × 600	≈ 90	≈ 145	8544.49	China
PC-13	RND-X (N)GRDGÖU-J 5G35	208 m	1	1400 × 850	≈ 555	≈ 700	8544.49	China
PC-14	RND-X (N)GRDGÖU 6x2x1	212 m	1	900 × 600	≈ 70	≈ 125	8544.49	China

07 Warranty, Trademarks & Legal Notice

Warranty: FeiChun accepts the RFQ warranty of 12 months from installation, to a maximum of 18 months from delivery. FeiChun's standard commitment of a minimum 3-year warranty against manufacturing defects applies in addition.

Third-party trademarks: CORDAFLEX®, RONDOFLEX®, SPREADERFLEX®, Prysmian® and the other referenced type designations are trademarks of their respective owners. They are cited solely to identify the reference types in the buyer's RFQ; no affiliation or endorsement is implied. FC-CFX™ and FC-FLX™ are trademarks of Anhui FeiChun Special Cable Co., Ltd.

INTELLECTUAL PROPERTY NOTICE — This document, including its drawings and data, is the property of Anhui FeiChun Special Cable Co., Ltd. and is protected under the Copyright Law of the People's Republic of China and the *Copyright Act 1968* (Cth) of Australia. It is issued for the evaluation of the referenced enquiry only and may not be reproduced, distributed or used for manufacture without written consent. Technical data are nominal values; FeiChun reserves the right to make design improvements without prior notice.

Prepared by
Zihao Yang · Technical Sales Manager

Checked by
Technical Department, FeiChun

Authorised Signature & Company Stamp
Date: 14 Oct 2026

ANHUI FEICHUN SPECIAL CABLE CO., LTD.

No. 1 Park, Private Science & Technology Park,
Hefei National Economic & Technological Development Zone,
Hefei, Anhui, P.R. China
FC-TDS-PWR-2026-S3P8 · Rev. 0 · 14 Oct 2026

TECHNICAL & SALES CONTACT

Technical: Tech@feichuncables.com
Mining & Port: mining@feichuncables.com
Zihao Yang: zihao.yang@feichuncables.com
WhatsApp: +86 138 5512 3218
Web: www.feichuncables.com