

FEICHUN SPECIAL CABLES
Website Address www.feichuncables.com
Whatsapp Account +86 138 5608 5607 & +86 138 5512 3218
Email Address ziyu.huang@feichuncables.com & zihao.yang@feichuncables.com

AS/NZS 1802:2003 Reeling & Trailing Cables

Type 240 1.1KV 3C185



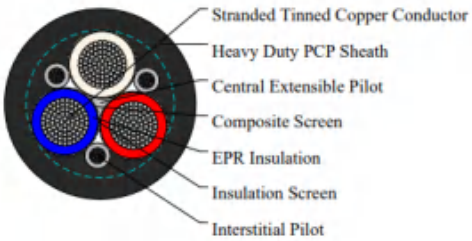

APPLICATIONS

Type 240 cable are primarily utilized as feeder cables for providing power to machinery or for longwall supply. They feature three large pilot cores and substantial core screens, ensuring low-resistance earthing.

STANDARDS

AS/NZS 1802:2003
AS/NZS 1125
AS/NZS 3808
AS/NZS 5000.1

CABLE CONSTRUCTION

- **Conductors:** Three flexible, stranded, tinned, annealed copper conductors.
- **Insulation:** Ethylene Propylene Rubber (EPR).
- **Insulation Screen:** Semiconductive elastomer.
- **Composite Screen (earth conductor):** Tinned, annealed copper braiding interwoven with polyester yarn.
- **Interstitial Pilots:** Three EPR-covered, flexible, stranded tinned copper conductors.
- **Cradle Separator:** Semiconductive Polychloroprene (PCP).
- **Sheath:** Heavy-duty PCP sheath, with an option for heavy-duty Chlorinated Polyethylene/Chlorosulfonated Polyethylene (CPE/CSP) sheath upon request.

DIMENSION AND PARAMETERS

Nominal Cross-sectional Area	No./ Nominal Diameter of Strands	Core Screen Strand Size	Core Screen Area of Screen	Pilot Conductor Strand Size	Pilot Conductor Thickness of Covering	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
mm²	no./mm	no./mm	mm²	no./mm	mm	mm	mm	mm	kg/km
185	518/0.67	7/0.3	30.2	63/0.67	1.4	2.5	7.4	77.4	1150