MINING REELING CONTROL CABLE · MOBILE MACHINERY | 0.6/1 kV | 5 sizes | CPE rubber

HIGH TENSILE · ARAMID BRAID

# FC-MCR-R-C-HT 8G 0.6/1 kV

Mining Reeling Control Cable 0.6/1 kV – 8-core reeling control cable with overall tinned-copper braid screen, with aramid tensile support braid, CPE rubber sheath. Complete technical data sheet: construction, dimensions, weights, current ratings, standards and installation guidance for 5 sizes.

Document no. FC-TDS-MC276-2026-9929-EN · Revision 0 · Issued 2 November 2026 · Language: English

## 01 Application and Product Overview

FC-MCR-R-C-HT 8G is a 8-core reeling control cable with overall tinned-copper braid screen, with aramid tensile support braid rated 0.6/1 kV for cable reels on drill rigs, LHD machines, shuttle cars and mobile mining plant. It has fine-wire class 5 copper cores with halogen-free EPR/HEPR rubber insulation, an inner sheath and an outer sheath of chlorinated polyethylene (CPE) rubber, resistant to weather, ozone and oil. Core cross-sections: 0.75 – 4 mm². An aramid tensile support braid between the inner and outer sheath carries the axial load; the permissible pull of the largest size is 2,760 N.

### Design

8 cores in concentric layers with a short lay length and polyester binder tape. Black cores carry white numbers; the green-yellow protective core lies in the outer layer. The cores are bound with halogen-free filler and covered by an inner sheath before the outer sheath is applied. A tinned-copper braid screen (≥ 85 % coverage) between the inner and outer sheath limits electromagnetic coupling between the control cores and nearby power cables. A braid of aramid yarn is applied between the inner and outer sheath. The permissible pull in the tables includes the braid. To use the rating, the load must be introduced through the braid, with a cable grip or strain-relief clamp that holds the sheath and braid at both ends, and never through the conductors.

### Typical applications

- Control, signal and measuring circuits of drill rigs, LHD machines, shuttle cars and mobile crushers supplied through a cable reel
- Spring-driven and motor-driven cable reels on mining machines, cable handlers and conveyor take-up systems
- Operation with repeated winding, unwinding and bending within the permitted bending radius
- Wet, muddy, oily and abrasive environments typical of underground headings and open pits
- Circuits that need protection against electromagnetic interference: the overall tinned-copper braid screen limits coupling between control cores and nearby power cables
- Open-pit and surface duty that calls for a rubber sheath with proven weather, ozone and oil resistance
- Steep declines, ramps, raises and shaft installations where the cable weight or the reel tension would otherwise load the conductors; the aramid braid carries the axial load

| 5 sizes | 0.6/1 kV | +90 °C | CPE rubber |
|---|---|---|---|
| Cross-section 0.75 – 4 mm² | Rated voltage $U_0/U$ | Maximum conductor temperature | Sheath: CPE rubber |

### Key features

- Fine-wire class 5 copper cores with insulation thickness to 0.6/1 kV for reliable operation on a reel
- Cores laid in concentric layers with a short lay length and polyester binder tape
- Number-printed black cores; green-yellow protective core in the outer layer (G types)
- Aramid tensile support braid: permissible pull up to 2,760 N in the largest size
- CPE rubber sheath with proven weather, ozone and oil resistance


© 2026 Anhui FeiChun Special Cable Co., Ltd.

- Overall tinned-copper braid screen (≥ 85 % coverage) for EMC
- Flame retardant to IEC 60332-1-2


### Service notes for mining duty

- Route control cables on the reel in a separate channel from MV or unscreened power cables, or use the screened version.
- Mark spare cores at both ends; a broken core in a reeling cable often appears first as an intermittent signal.

## 02 Construction

**FEICHUN · CROSS-SECTION A-A · 0.6/1 kV**

**FC-MCR-R-C-HT**
Sample size 8G1.5 C · Rev 0 · Illustrative, not to scale

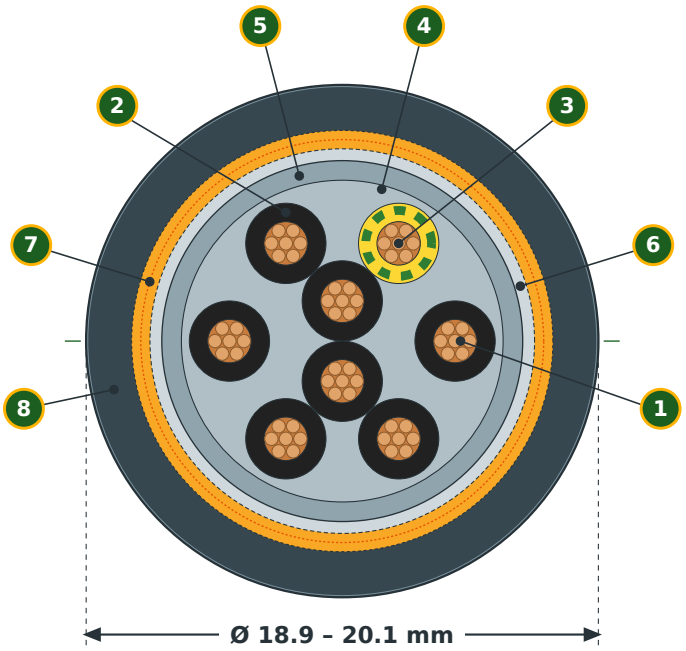


| No. | Component | Material |
|---|---|---|
| 1 | Conductor | Bare annealed fine-wire copper, class 5 to IEC 60228 |
| 2 | Insulation | Halogen-free EPR/HEPR rubber |
| 3 | Protective (PE) core | Class 5 copper, green-yellow insulation |
| 4 | Filler and binder tape | Halogen-free compound, polyester tape |
| 5 | Inner sheath | Halogen-free polymer compound |
| 6 | Overall screen | Tinned-copper wire braid, coverage ≥ 85 % |
| 7 | Tensile support braid | Aramid yarn braid between inner and outer sheath; carries the axial load |
| 8 | Outer sheath | Chlorinated polyethylene (CPE) rubber, resistant to weather, ozone and oil |

The drawing shows size 8G1.5 C. Other sizes have the same construction with scaled dimensions.

### Construction details

| | |
|---|---|
| **Conductor** | Bare annealed fine-wire copper, class 5 to DIN EN 60228 / IEC 60228 / VDE 0295 |
| **Insulation** | Halogen-free EPR/HEPR rubber to IEC 60502-1, maximum conductor temperature 90 °C |
| **Core identification** | Black cores with white numbers; green-yellow protective core in the outer layer |
| **Stranding** | Cores stranded in concentric layers with a short lay length; polyester binder tape |
| **Overall screen** | Tinned-copper wire braid, coverage ≥ 85 %, between inner and outer sheath |
| **Inner sheath** | Halogen-free polymer compound, extruded tightly over the stranded cores |
| **Tensile support braid** | Aramid yarn braid, 0.70 mm thick, between the inner and the outer sheath; the braid carries the axial load |
| **Outer sheath** | Chlorinated polyethylene (CPE) rubber, resistant to weather, ozone and oil |

### Sheath material

The chlorinated polyethylene (CPE) rubber sheath offers good resistance to weather, ozone and mineral oil with good mechanical robustness and flexibility to −30 °C in motion, at a favourable cost level. CPE contains halogen; where halogen-free cables are specified, select the PUR version of the same construction.


© 2026 Anhui FeiChun Special Cable Co., Ltd.

## 03 Electrical, Thermal and Mechanical Characteristics

### Electrical data

| | |
|---|---|
| **Rated voltage $U_0/U$** | 0.6/1 kV AC |
| **Test voltage** | 3.5 kV AC, 5 min |
| **Maximum operating voltage, DC** | 0.9/1.8 kV |
| **Current-carrying capacity** | To DIN VDE 0298-4 at 30 °C ambient; the table gives rated design values |
| **Conductor resistance** | Maximum at 20 °C, class 5 to IEC 60228 |

### Thermal and mechanical data

| | |
|---|---|
| **Maximum conductor temperature** | +90 °C |
| **Maximum temperature at short circuit** | +250 °C |
| **Ambient temperature, fixed installation** | −40 °C to +90 °C |
| **Ambient temperature, in motion** | −30 °C to +90 °C |
| **Minimum bending radius** | Fixed: 4 × D (D ≥ 8 mm), 3 × D (D < 8 mm); moving or reeling: 6 × D (D ≤ 12 mm), 8 × D (D ≤ 20 mm), 10 × D (D > 20 mm) |
| **Maximum tensile load** | 15 N/mm² on the copper cross-section plus the permissible load of the aramid support braid; the pull force of each size is in section 04 and in the tensile table |
| **Maximum travelling speed** | 60 m/min on a cable reel; higher speeds on request |
| **Flame propagation** | IEC 60332-1-2 / DIN EN 60332-1-2 |
| **Halogen-free** | No (CPE rubber sheath) |
| **UV and ozone resistance** | Resistant |
| **Mineral oil resistance** | Resistant, IEC 60811-404 |

## 04 Dimensions, Weights and Rated Data – 0.6/1 kV (5 sizes)

| Type designation cores × mm² | FeiChun article no. | Conductor Ø max mm | Outer Ø min mm | Outer Ø max mm | Min. bend radius mm | Weight approx. kg/km | Max. pull force N | $R_{20}$ max Ω/km | Current per core A | $I_k$ (1 s) kA |
|---|---|---|---|---|---|---|---|---|---|---|
| **8G0.75 C** | FC-MC276-001 | 1.2 | 16.9 | 17.9 | 144 | 355 | 1,510 | 26.0 | 9 | 0.107 |
| **8G1 C** | FC-MC276-002 | 1.4 | 17.6 | 18.7 | 150 | 396 | 1,630 | 19.5 | 10 | 0.143 |
| **8G1.5 C** | FC-MC276-003 | 1.7 | 18.9 | 20.1 | 200 | 470 | 1,860 | 13.3 | 14 | 0.214 |
| **8G2.5 C** | FC-MC276-004 | 2.2 | 20.9 | 22.2 | 222 | 610 | 2,250 | 7.98 | 19 | 0.357 |
| **8G4 C** | FC-MC276-005 | 2.7 | 23.3 | 24.7 | 248 | 800 | 2,760 | 4.95 | 25 | 0.572 |

Current-carrying capacity: rated design values to DIN VDE 0298-4 for flexible cables, free air, 30 °C ambient; values per core include the derating factor for the number of cores; for other ambient temperatures, grouping or layered winding on a reel, apply the factors below. Pull force = 15 N/mm² × total copper cross-section of the power cores plus the permissible load of the aramid support braid (split out in the tensile table). Diameters, dimensions and weights are nominal design values and vary within manufacturing tolerances; confirm critical dimensions before dimensioning reels, guides or festoon systems. Other sizes and configurations are produced to order.

### Ambient temperature factors (conductor 90 °C)

| °C | 20 | 25 | 30 | 35 | 40 | 45 | 50 |
|---|---|---|---|---|---|---|---|
| Factor | 1.08 | 1.04 | 1.00 | 0.96 | 0.91 | 0.87 | 0.82 |

### Short-circuit current rating

$I_k$ = 0.143 kA/mm² × cross-section of the power core (conductor 90 °C → 250 °C). For another short-circuit duration t: $I_{k,t} = I_{k,1s} / \sqrt{t}$ (0.1 s ≤ t ≤ 5 s).


© 2026 Anhui FeiChun Special Cable Co., Ltd.

## 05 Reeling Performance and Reel Design Data

The values below support the dimensioning of the cable reel: minimum reel core diameter, copper weight for earthing and loop-resistance calculations, cable weight, and the rated current for the number of layers wound on the reel.

| Type designation cores × mm² | Outer Ø max mm | Min. bend radius on reel, mm | Min. reel core Ø mm | Copper weight kg/km | Cable weight kg/100 m |
|---|---|---|---|---|---|
| 8G0.75 C | 17.9 | 144 | 288 | 107 | 35.5 |
| 8G1 C | 18.7 | 150 | 300 | 128 | 39.6 |
| 8G1.5 C | 20.1 | 200 | 400 | 169 | 47.0 |
| 8G2.5 C | 22.2 | 222 | 444 | 248 | 61.0 |
| 8G4 C | 24.7 | 248 | 496 | 365 | 80.0 |

### Reel design guidance

- Minimum reel core diameter = 2 × minimum bending radius = 2 × minimum bending radius (outer diameter D).
- Spring reels suit short travel and low tensile load; motor-driven reels with torque control keep the cable under constant, low tension.
- Fit a guide or level-wind that keeps the cable parallel to the reel axis to prevent crossing turns.

## 06 Tensile Performance of the Aramid Support Braid

The aramid braid adds its own permissible working load to the copper-based rating. The table splits the permissible pull of every size into the copper part (15 N/mm² × copper cross-section) and the braid part, and shows how long a length of cable can hang vertically before its own weight reaches the rated pull. The braid part is a design value: aramid yarn strength 2,900 N/mm², braid efficiency 0.70 and a safety factor of 15 on the yarn strength. Introduce the load only through a cable grip or strain-relief clamp that holds the sheath and the braid.

| Type designation cores × mm² | Pull, copper only N | Pull, aramid braid N | Total permissible pull N | Factor × standard | Free-hanging length m (vertical) |
|---|---|---|---|---|---|
| 8G0.75 C | 90 | 1,420 | 1,510 | 16.8 | 433 |
| 8G1 C | 120 | 1,510 | 1,630 | 13.6 | 419 |
| 8G1.5 C | 180 | 1,680 | 1,860 | 10.3 | 403 |
| 8G2.5 C | 300 | 1,950 | 2,250 | 7.5 | 375 |
| 8G4 C | 480 | 2,280 | 2,760 | 5.8 | 351 |

Free-hanging length = permissible pull ÷ (weight × 9.81). For hoisting, shaft suspension or lifting applications apply the safety factor required by the applicable regulations and confirm the arrangement with FeiChun.

## 07 Selection Guide and Sizing Aid

FC-MCR-R-C-HT 8G covers 5 sizes. The smallest, 8G0.75 C, has an outer diameter of up to 17.9 mm and weighs about 355 kg/km; the largest, 8G4 C, has an outer diameter of up to 24.7 mm and weighs about 800 kg/km, 2.3 times as much. Across the range the rated current per core rises from 9 A to 25 A at 30 °C, and the minimum bending radius from 144 mm to 248 mm.

**Example 1.** A circuit carries 8 A per core at an ambient temperature of 40 °C. Required table current = 8 / 0.91 = 9 A per core. The smallest suitable size is 8G0.75 C with 9 A per core.

**Example 2.** A circuit carries 17 A per core at an ambient temperature of 35 °C. Required table current = 17 / 0.96 = 18 A per core. The smallest suitable size is 8G2.5 C with 19 A per core.

| Type designation cores × mm² | Total copper mm² | Cable weight kg/100 m | Winding capacity m | Free-hanging length m (vertical) |
|---|---|---|---|---|
| 8G0.75 C | 6 | 35.5 | 13,090 | 433 |
| 8G1 C | 8 | 39.6 | 12,035 | 419 |
| 8G1.5 C | 12 | 47.0 | 10,410 | 403 |
| 8G2.5 C | 20 | 61.0 | 8,575 | 375 |
| 8G4 C | 32 | 80.0 | 6,715 | 351 |

Winding capacity is an indicative value for a reel with 2,500 mm flange diameter, 1,000 mm traverse width, core diameter equal to the minimum reel core diameter and 90 % fill; it is not a substitute for the reel manufacturer’s calculation. Free-hanging length = permissible pull ÷ (weight × 9.81); it is the length at which the cable’s own weight reaches the rated pull, without any safety factor for hoisting.


© 2026 Anhui FeiChun Special Cable Co., Ltd.

## 08 Engineering Profile by Size

Each size of FC-MCR-R-C-HT 8G with the values that matter when sizing a circuit: dimensions, weight, copper share, heat and voltage drop at rated current, and the permissible pull. Voltage drop is for 100 m of cable at rated current with conductors at 90 °C (single-phase AC or DC round trip).

For 8G0.75 C the design values are: Ø 17.9 mm, 355 kg/km, 1,510 N permissible pull (90 N copper, 1,420 N braid), 9 A rated current. The copper accounts for 30% of the weight, and 5.4 W/m is dissipated at full load, so heat-sensitive reel layers should be derated as shown in section 04. Reel and handling: at 8G0.75 C the minimum reel core is 288 mm and the cable weighs 35.5 kg per 100 m, so a 500 m length weighs about 178 kg before the drum.

Size 8G1 C has a maximum conductor resistance of 19.50 Ω/km, a copper content of 128 kg/km and a minimum bending radius of 150 mm (reel core 300 mm). Short-circuit capability for 1 s is 0.14 kA. Expect 49.7 V of drop per 100 m at 10 A. Per 100 m, 8G1 C contains 12.8 kg of copper and 26.8 kg of insulation, filler and sheath material, which sets the scrap value and the recycling split.

At 8G1.5 C the cable measures Ø 20.1 mm and weighs roughly 470 kg/km. It carries 14 A at 30 °C ambient, which produces 6.6 W/m of heat and a 47.5 V drop per 100 m. The permissible pull is 1,860 N, so a vertical length of 403 m can hang from its own weight before that limit is reached. Handling 8G1.5 C: 47.0 kg per 100 m, bending radius 200 mm; two people can lift a 20 m piece of about 9.4 kg.

At 8G2.5 C the cable measures Ø 22.2 mm and weighs roughly 610 kg/km. It carries 19 A at 30 °C ambient, which produces 7.3 W/m of heat and a 38.7 V drop per 100 m. The permissible pull is 2,250 N, so a vertical length of 375 m can hang from its own weight before that limit is reached. A 500 m length of 8G2.5 C weighs about 305 kg; with a 444 mm minimum core the drum must be sized for that load.

8G4 C: outer Ø 24.7 mm, about 800 kg/km of which 365 kg/km is copper (46%). Rated current is 25 A in free air at 30 °C; at that current the conductor loss is about 7.9 W per metre and the voltage drop over 100 m is 31.6 V (conductors at 90 °C). Reel and handling: at 8G4 C the minimum reel core is 496 mm and the cable weighs 80.0 kg per 100 m, so a 500 m length weighs about 400 kg before the drum.

## 09 Configuration Guidance and Variant Comparison

Typical case: a drill rig that moves its control and sensor signals in a separate channel from the power reel. For this case FC-MCR-R-C-HT 8G is a fit in the 8G1.5 C size (Ø 20.1 mm).

CPE rubber is the economical rubber option for surface trailing and reeling duty where halogen-free materials are not required.

Rated 0.6/1 kV, the cable covers the common 400 V, 690 V and 1,000 V mining supplies.

In the drawn size 8G1.5 C the cores fill 50% of the circle inside the inner sheath, the inner sheath is 0.7 mm thick, the screen 0.45 mm, the aramid braid 0.70 mm and the outer sheath 1.7 mm, giving a total wall of 3.6 mm around a core bundle of Ø 12.2 mm.

The aramid braid adds 1,680 N of permissible pull in the 8G1.5 C size (1,860 N total instead of 180 N), at the cost of about 1.4 mm more diameter and 11 kg/km more weight than the standard design.

FC-MCR-R-C-HT 8G is one of 360 datasheets in the mining reeling control cable group and one of 953 in the library. The next smaller core count, FC-MCR-R-C-HT 7G, has an outer Ø of 17.2 mm at 1.5 mm² against 20.1 mm here. The next larger core count, FC-MCR-R-C-HT 10G, measures 20.3 mm and weighs 510 kg/km (this model: 470 kg/km).

### Element inventory and core layout

Element inventory of the drawn size 8G1.5 C: 8 elements with 12.0 mm² of copper in total. The 8 cores are stranded in 2 concentric layers (layer 1: 2 cores; layer 2: 6 cores), counted from the centre outwards, each layer with a short lay length and alternating lay direction. Keeping about 15 % of the cores as spare leaves 5 usable circuits plus the protective core; plan the core allocation before ordering because the number cannot be changed after manufacture.

| Element | Quantity | Cross-section | Ø over insulation mm | Copper mm² |
|---|---|---|---|---|
| Power / main core | 7 | 1.5 mm² | 3.1 | 10.5 |
| Protective (PE) conductor | 1 | 1.5 mm² | 3.1 | 1.5 |


© 2026 Anhui FeiChun Special Cable Co., Ltd.

### Termination data (indicative)

| Type designation cores × mm² | Outer Ø or W × H mm | Cable gland thread | Lug / ferrule bolt | Strip length mm | Terminal row mm | Gland-to-bend straight mm |
|---|---|---|---|---|---|---|
| 8G0.75 C | 17.9 | M32 | ferrule | 12 | 41 | 72 |
| 8G1 C | 18.7 | M32 | ferrule | 12 | 41 | 75 |
| 8G1.5 C | 20.1 | M32 | ferrule | 12 | 41 | 100 |
| 8G2.5 C | 22.2 | M40 | ferrule | 12 | 41 | 111 |
| 8G4 C | 24.7 | M40 | ferrule | 12 | 60 | 124 |

Gland, lug and terminal-row values are planning guides computed from the dimensions above; confirm them with the accessory manufacturer.

### Comparison with related variants at size 8G1.5 C

| Variant | Differs in | Outer Ø / H mm | Weight kg/km | Pull N | Current A |
|---|---|---|---|---|---|
| **This datasheet** FC-MCR-R-C-HT 8G | – | 20.1 | 470 | 1,860 | 14 |
| FC-MCR-S-C-HT 8G 0.6/1 kV | sheath | 20.1 (+0%) | 480 (+2%) | 1,860 (+0%) | 14 (+0%) |
| FC-MCR-A-C-HT 8G 0.6/1 kV | sheath | 20.1 (+0%) | 450 (-4%) | 1,860 (+0%) | 14 (+0%) |
| FC-MCR-R-C-HT 7G 0.6/1 kV | configuration | 17.2 (-14%) | 371 (-21%) | 1,490 (-20%) | 16 (+14%) |
| FC-MCR-R-C-HT 10G 0.6/1 kV | configuration | 20.3 (+1%) | 510 (+9%) | 1,940 (+4%) | 14 (+0%) |
| FC-MCR-R-HT 8G 0.6/1 kV | screen | 19.1 (-5%) | 399 (-15%) | 1,760 (-5%) | 14 (+0%) |
| FC-MCR-R-C 8G 0.6/1 kV | tensile braid | 18.6 (-7%) | 420 (-11%) | 180 (-90%) | 14 (+0%) |

Percentages show the change against this datasheet for the same cross-section; use them to judge what a change of sheath, voltage class, screen or tensile braid costs in size and weight.

## 10 Standards and Testing

| Standard | Scope |
|---|---|
| **DIN EN 60228 / IEC 60228 / VDE 0295** | Conductors, class 5 |
| **IEC 60502-1** | Insulation compound, power cables up to 1 kV |
| **DIN VDE 0298-3** | Application of cables – bending radii and tensile loads |
| **DIN VDE 0298-4** | Application of cables – current-carrying capacity |
| **DIN EN 60332-1-2 / IEC 60332-1-2** | Flame propagation, single cable |
| **DIN VDE 0293-308** | Core identification |
| **IEC 60811-404** | Mineral oil immersion test |

### Routine and type tests

- AC voltage test on every reel length (routine test): 3.5 kV AC, 5 min
- Conductor resistance and checks of dimensions, insulation thickness and sheath thickness
- Continuity of conductors and protective earth
- Bending, tensile tests (type test)
- Flame propagation (IEC 60332-1-2)
- Tensile test of the finished cable including elongation at the rated pull, and inspection of the aramid braid coverage (type test)

**Test documentation:** every delivery is accompanied by a test certificate from FeiChun’s own laboratory. Third-party witnessed tests can be arranged at the buyer’s cost.


© 2026 Anhui FeiChun Special Cable Co., Ltd.

## 11 Installation, Marking and Delivery

### Installation guidance

- Use a reel core diameter of at least twice the minimum bending radius; keep the cable free of loops and kinks while winding.
- Connect the protective core (G types) at both ends; terminate the screen 360° where fitted.
- Keep control cables away from unscreened power cables running in parallel where possible.
- Inspect the sheath regularly for abrasion and mechanical damage.
- Terminate the tensile braid: fix the cable with a cable grip or strain-relief clamp that holds the sheath and braid at both ends, so the braid, not the conductors, carries the load.

### Sheath marking

FEICHUN FC-MCR-R-C-HT [cross-section] 0.6/1 kV [year] [serial no.] [metre mark]

### Packing and delivery

| | |
|---|---|
| **Reel** | Steel or fumigated wooden reels; cable ends sealed with heat-shrink caps |
| **Delivery length** | As ordered, in one continuous length without joints |
| **Lead time** | 2–3 weeks after technical approval |
| **Warranty** | At least 3 years against manufacturing defects |
| **Reel label** | Type, cross-section, length, gross/net weight, batch no., reel no. |

### Ordering information

**Order example: FC-MCR-R-C-HT 8G1.5 C 0.6/1 kV** – 500 m on one steel reel. When requesting a quotation, state the cable type, configuration, cross-section, voltage, length per piece, required standards and installation conditions.

## 12 Certification and Quality

All cable is subject to FeiChun’s quality control, with routine testing over 100 % of the delivered length. Certificates, type tests and third-party tests (for example partial discharge or compatibility with cable accessories) are provided per project requirement; copies of the records are available on request.

Mine-specific approvals (for example coal-mine safety marks, MSHA, or ATEX / IECEx for gassy atmospheres) are not implied by this datasheet; they depend on the project, the machine and the country and are arranged with the end user.

## 13 Related Datasheets

Variants of this cable with a different sheath, configuration or voltage. All datasheets are in PDF format.

- FC-MCR-S-C-HT 8G 0.6/1 kV – 8-core reeling control cable with overall tinned-copper braid screen, with aramid tensile support braid, CSP rubber
- FC-MCR-A-C-HT 8G 0.6/1 kV – 8-core reeling control cable with overall tinned-copper braid screen, with aramid tensile support braid, PUR low-temp
- FC-MCR-R-C-HT 7G 0.6/1 kV – 7-core reeling control cable with overall tinned-copper braid screen, with aramid tensile support braid, CPE rubber
- FC-MCR-R-C-HT 10G 0.6/1 kV – 10-core reeling control cable with overall tinned-copper braid screen, with aramid tensile support braid, CPE rubber
- FC-MCR-R-HT 8G 0.6/1 kV – 8-core reeling control cable, with aramid tensile support braid, CPE rubber
- FC-MCR-R-C 8G 0.6/1 kV – 8-core reeling control cable with overall tinned-copper braid screen, CPE rubber
- FC-MCR-R-C-HT 5G 0.6/1 kV – 5-core reeling control cable with overall tinned-copper braid screen, with aramid tensile support braid, CPE rubber
- FC-MCR-R-C-HT 12G 0.6/1 kV – 12-core reeling control cable with overall tinned-copper braid screen, with aramid tensile support braid, CPE rubber

Overview of all datasheets: Mining Reeling Control Cables 300/500 V and 0.6/1 kV

### Frequently asked questions

**What is FC-MCR-R-C-HT 8G used for?**
Typical applications include control, signal and measuring circuits of drill rigs, LHD machines, shuttle cars and mobile crushers supplied through a cable reel.

**What are the outer diameter and minimum bending radius of 8G1.5 C?**
The outer diameter is 18.9 to 20.1 mm and the minimum bending radius in moving or reeling operation is 200 mm (6 to 10 × D depending on diameter).

**What minimum reel core diameter is needed for 8G1.5 C?**
At least 400 mm, which is twice the minimum bending radius of 200 mm. A larger core diameter extends cable life.


© 2026 Anhui FeiChun Special Cable Co., Ltd.

**What current can each core of 8G1.5 C carry?**
The table gives 14 A per core in free air at 30 °C ambient, already reduced for the number of cores; apply the ambient temperature factor and, on a reel, the layer factor.

**How much tensile load can 8G1.5 C take, and how long can it hang freely?**
The permissible pull force is 1,860 N (including the aramid braid; 180 N on the copper alone). With a weight of about 470 kg/km this corresponds to a free-hanging vertical length of about 403 m before the rated pull is reached; apply your own safety factor for hoisting or suspended installations.

**What does the tensile support braid add compared with the standard design?**
It raises the permissible pull of 8G1.5 C from 180 N to 1,860 N, a factor of 10.3, and keeps the conductors from stretching and the cores from forming loops. The cable is somewhat larger and heavier than the standard version because of the braid layer.

**What is the voltage drop and heat loss of 8G1.5 C at rated current?**
At 14 A and a conductor temperature of 90 °C the voltage drop is about 47.5 V per 100 m and the conductor loss about 6.6 W per metre (maximum resistance 13.300 Ω/km at 20 °C).

**Is this cable halogen-free?**
No. The CPE rubber sheath contains halogen. If halogen-free cables are required, select the PUR version of the same construction.

**Which cross-sections are available?**
FC-MCR-R-C-HT 8G: 0.75, 1, 1.5, 2.5, 4 mm². Other sizes and special designs can be produced to order.

**Does this datasheet include mine-specific approvals?**
No. Mine-specific approvals, such as coal-mine safety marks, MSHA or ATEX/IECEx for gassy atmospheres, depend on the project and the country and are not implied by this document. Send the requirements to FeiChun technical support.

## 14 Trademark Notice and Intellectual Property

**© 2026 Anhui FeiChun Special Cable Co., Ltd. — All rights reserved.** This document, including its drawings, tables and layout, is the intellectual property of FeiChun and is protected under the Copyright Law and the Anti-Unfair Competition Law of the People's Republic of China and the Copyright Act 1968 (Cth) of Australia. Reproduction, distribution or modification of the whole or any part without written consent is prohibited. Technical data may change without notice as part of continuous product improvement.

### Technical and commercial contacts

**Anhui FeiChun Special Cable Co., Ltd.**
International Business Department
Park No. 1, Private Science and Technology Park, Hefei National Economic and Technological Development Zone, Hefei, Anhui, China
Technical support: Tech@feichuncables.com
Mining and heavy industry: mining@feichuncables.com
Zihao Yang, Global Sales Manager: zihao.yang@feichuncables.com
WhatsApp: +86 138 5512 3218
Web: www.feichuncables.com

### Document control

**Document no.** FC-TDS-MC276-2026-9929-EN
**Revision** 0 — first issue
**Date** 2 November 2026
**Product** FC-MCR-R-C-HT 0.6/1 kV

Prepared — Engineering | Checked — QC | Approved — International Business


© 2026 Anhui FeiChun Special Cable Co., Ltd.