TDS · PROJECT PACKAGE | GB/T 12706 · IEC 60502-1/-2 | IEC 60332-3-24 Cat. C | SANS cross-referenced | 61 lines · 8 families

South Africa Project Cable Package
Technical Data Sheet

LV & MV XLPE power, VSD, screened control, rubber cabtyre and earthing conductors — engineered to the client schedule “Cable breakdown · SA terms”, with every line mapped to a FeiChun construction.

Doc. no. **FC-TDS-ZAP-2026-CF31** Revision **A** Issued **2026-10-09** Scheduled length **36,071 m** + TBC lines Destination **Republic of South Africa**

01 Package overview & document control

FC-TDS-ZAP-2026-CF31

The client schedule lists 61 cable lines translated into South African procurement terms. FeiChun has grouped them into eight product families; each family carries its own sub-document number so it can be referenced independently in submittals, test reports and the packing list.

ZR-YJV 0.6/1 kV — A
11,851 m
22 lines

ZR-YJV22 0.6/1 kV — B
1,260 m
6 lines

ZR-BPYJV 0.6/1 kV — C
170 m
2 lines

ZR-YJV / ZR-YJV22 6/6 kV · 8.7/15 kV — D
850 + TBC m
7 lines

ZR-KVVP 450/750 V — E
14,410 + TBC m
13 lines

FC-FLX™ H07RN-F 450/750 V — F
2,180 + TBC m
4 lines

FC-BCE 1×150 mm² — G
3,400 m
3 lines

FC-ATE anti-theft earth conductor — H
1,950 m
4 lines

Fam.	Sub-document no.	Product	Lines	Qty m
A	FC-TDS-YJV-2026-CF31	**ZR-YJV 0.6/1 kV** Flame-retardant Cu/XLPE/PVC power cable, unarmoured	22	11,851
B	FC-TDS-Y22-2026-CF31	**ZR-YJV22 0.6/1 kV** Flame-retardant Cu/XLPE/PVC/STA/PVC armoured power cable	6	1,260
C	FC-TDS-VFD-2026-CF31	**ZR-BPYJV 0.6/1 kV** Flame-retardant symmetrical VSD/VFD power cable, copper-screened	2	170
D	FC-TDS-MVX-2026-CF31	**ZR-YJV / ZR-YJV22 6/6 kV · 8.7/15 kV** Flame-retardant Cu/XLPE MV power cable, Cu-tape screened	7	850 +TBC
E	FC-TDS-KVP-2026-CF31	**ZR-KVVP 450/750 V** Flame-retardant PVC multicore control cable, copper-braid screened	13	14,410 +TBC
F	FC-TDS-RNF-2026-CF31	**FC-FLX™ H07RN-F 450/750 V** Heavy-duty rubber flexible cable (cabtyre)	4	2,180 +TBC
G	FC-TDS-BCE-2026-CF31	**FC-BCE 1×150 mm²** Bare stranded copper earth / lightning-protection conductor	3	3,400
		Package total	**61**	**36,071 + TBC**

Fam.	Sub-document no.	Product	Lines	Qty m
H	FC-TDS-ATE-2026-CF31	**FC-ATE anti-theft earth conductor** Copper-clad steel (CCS) stranded earthing conductor, anti-theft	4	1,950
		Package total	**61**	**36,071 + TBC**

DOCUMENT CONTROL

Document	FC-TDS-ZAP-2026-CF31
Title	Technical Data Sheet — South Africa project cable package
Client reference	Cable breakdown — SA terms (61 lines)
Revision / date	A · 2026-10-09 · first issue for client review
Prepared by	Zihao Yang, Technical Sales — International Business Dept.
Reviewed by	FeiChun Technical Department
Manufacturer	Anhui FeiChun Special Cable Co., Ltd., Hefei, Anhui, China
Units / language	SI units · Australian English
Values	Dimensions and masses are nominal design values (≈); limits (R_{20}, test voltages) are guaranteed

02 Schedule cross-reference — client line → FeiChun offer

61 lines

Item numbers follow the client schedule. “Family” links to the construction and data section for that product.

Item	Category	Client designation (as scheduled)	South African trade description	FeiChun offer	Family	Qty m
1	Earthing / Grounding	1x150 mm²	Anti-theft earth conductor (copper-clad steel)	**FC-ATE CCS 40% IACS · 1×150 mm²**	H · ATE	200
2	Earthing / Grounding	1x70 mm²	Anti-theft earth conductor (copper-clad steel)	**FC-ATE CCS 40% IACS · 1×70 mm²**	H · ATE	300
3	Earthing / Grounding	1x150 mm²	Anti-theft earth conductor (copper-clad steel)	**FC-ATE CCS 40% IACS · 1×150 mm²**	H · ATE	150
4	Earthing / Grounding	Specification/size not clearly legible in schedule	Anti-theft earth conductor (copper-clad steel)	**FC-ATE CCS 40% IACS · size TBC**	H · ATE	1,300
5	Earthing / Grounding	1x150 mm²	Bare copper earth conductor, stranded	**FC-BCE bare Cu · 1×150 mm² (37/2.25)**	G · BCE	150
6	Earthing / Grounding	1x150 mm²	Bare copper earth conductor, stranded	**FC-BCE bare Cu · 1×150 mm² (37/2.25)**	G · BCE	2,750
7	Power	3x2.5	Rubber cabtyre, 3-core (L + N + E)	**H07RN-F 450/750 V · 3G2.5**	F · RNF	TBC
8	Power	3x2.5	Rubber cabtyre, 3-core (L + N + E)	**H07RN-F 450/750 V · 3G2.5**	F · RNF	1,400
9	Power	3x4	Rubber cabtyre, 3-core (L + N + E)	**H07RN-F 450/750 V · 3G4**	F · RNF	680
10	Power	3x4.0	Rubber cabtyre, 3-core (L + N + E)	**H07RN-F 450/750 V · 3G4**	F · RNF	100
11	Control	ZR-KVVP-450/750 V, 12x1.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 12×1.5**	E · KVP	1,400
12	Control	ZR-KVVP-450/750 V, 2x1.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 2×1.5**	E · KVP	300
13	Control	ZR-KVVP-450/750 V, 3x2.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 3×2.5**	E · KVP	260
14	Control	ZR-KVVP-450/750 V, 4x1.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 4×1.5**	E · KVP	2,600
15	Control	ZR-KVVP-450/750 V, 4x2.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 4×2.5**	E · KVP	1,900
16	Control	ZR-KVVP-450/750V, 10x1.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 10×1.5**	E · KVP	750
17	Control	ZR-KVVP-450/750V, 12x1.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 12×1.5**	E · KVP	760
18	Control	ZR-KVVP-450/750V, 12x2.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 12×2.5**	E · KVP	TBC
		61 line items			Total	**36,071 + TBC**

Item	Category	Client designation (as scheduled)	South African trade description	FeiChun offer	Family	Qty m
19	Control	ZR-KVVP-450/750V, 2x1.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 2×1.5**	E · KVP	220
20	Control	ZR-KVVP-450/750V, 3x2.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 3×2.5**	E · KVP	80
22	Control	ZR-KVVP-450/750V, 4x1.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 4×1.5**	E · KVP	850
23	Control	ZR-KVVP-450/750V, 4x2.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 4×2.5**	E · KVP	4,240
24	Control	ZR-KVVP-450/750V, 6x2.5	Screened multicore control cable, PVC/Cu braid/PVC	**ZR-KVVP 450/750 V · 6×2.5**	E · KVP	1,050
25	Lighting	3 × 2.5 mm²	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 3×2.5**	A · YJV	250
26	Lightning / Grounding	1 × 150 mm² bare earth wire	Bare copper earth conductor, stranded	**FC-BCE bare Cu · 1×150 mm² (37/2.25)**	G · BCE	500
27	Power	YJV-0.6/1kV-1x95	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**YJV 0.6/1 kV · 1×95**	A · YJV	10
28	Power	ZR-BPYJV-0.6/1 kV, 3x25+3x4	VSD (variable speed drive) cable, symmetrical 3+3 earth, Cu-screened	**ZR-BPYJV 0.6/1 kV · 3×25+3×4**	C · VFD	70
29	Power	ZR-BPYJV-0.6/1 kV, 3x35+3x6	VSD (variable speed drive) cable, symmetrical 3+3 earth, Cu-screened	**ZR-BPYJV 0.6/1 kV · 3×35+3×6**	C · VFD	100
30	Power	ZR-YJV-0.6/1 kV, 1x150 mm²	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 1×150**	A · YJV	5
31	Power	ZR-YJV-0.6/1 kV, 3x25+1x16	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 3×25+1×16**	A · YJV	1,300
32	Power	ZR-YJV-0.6/1 kV, 3x50+2x25	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 3×50+2×25**	A · YJV	2,500
33	Power	ZR-YJV-0.6/1 kV, 3x70+2x35	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 3×70+2×35**	A · YJV	130
34	Power	ZR-YJV-0.6/1 kV, 4x16	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 4×16**	A · YJV	300
35	Power	ZR-YJV-0.6/1 kV, 4x2.5	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 4×2.5**	A · YJV	700
36	Power	ZR-YJV-0.6/1 kV, 5x16	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 5×16**	A · YJV	200
37	Power	ZR-YJV-0.6/1kV-1x150	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 1×150**	A · YJV	6
38	Power	ZR-YJV-0.6/1kV-3x25+2x16	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 3×25+2×16**	A · YJV	200
39	Power	ZR-YJV-0.6/1kV-3x35+2x16	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 3×35+2×16**	A · YJV	40
40	Power	ZR-YJV-0.6/1kV-3x50+2x25	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 3×50+2×25**	A · YJV	280
41	Power	ZR-YJV-0.6/1kV-3x95+2x50	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 3×95+2×50**	A · YJV	110
42	Power	ZR-YJV-0.6/1kV-4x10	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 4×10**	A · YJV	1,000
43	Power	ZR-YJV-0.6/1kV-4x2.5	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 4×2.5**	A · YJV	1,800
44	Power	ZR-YJV-0.6/1kV-4x25	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 4×25**	A · YJV	760
45	Power	ZR-YJV-0.6/1kV-4x35	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 4×35**	A · YJV	960
46	Power	ZR-YJV-0.6/1kV-4x4	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 4×4**	A · YJV	130
47	Power	ZR-YJV-0.6/1kV-4x6	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 4×6**	A · YJV	40
48	Power	ZR-YJV-0.6/1kV-5x10	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 5×10**	A · YJV	800
49	Power	ZR-YJV-0.6/1kV-5x16	Cu/XLPE/PVC 600/1000 V unarmoured power cable (FR)	**ZR-YJV 0.6/1 kV · 5×16**	A · YJV	330
50	Power	ZR-YJV-6/6kV-3x95	6.6 kV / 11 kV system XLPE MV cable (unarmoured / armoured)	**ZR-YJV 6/6 kV · 3×95**	D · MVX	200
51	Power	ZR-YJV-8.7/15kV-3x120	6.6 kV / 11 kV system XLPE MV cable (unarmoured / armoured)	**ZR-YJV 8.7/15 kV · 3×120**	D · MVX	50
52	Power	ZR-YJV-8.7/15kV-3x240	6.6 kV / 11 kV system XLPE MV cable (unarmoured / armoured)	**ZR-YJV 8.7/15 kV · 3×240**	D · MVX	5
		61 line items			Total	**36,071 + TBC**

Item	Category	Client designation (as scheduled)	South African trade description	FeiChun offer	Family	Qty m
53	Power	ZR-YJV-8.7/15kV-3x50	6.6 kV / 11 kV system XLPE MV cable (unarmoured / armoured)	ZR-YJV 8.7/15 kV · 3×50	D · MVX	25
54	Power	ZR-YJV22-0.6/1 kV, 3x25+2x16	Cu/XLPE/PVC/STA/PVC 600/1000 V armoured power cable (FR)	ZR-YJV22 0.6/1 kV · 3×25+2×16	B · Y22	80
55	Power	ZR-YJV22-0.6/1 kV, 3x50+2x25	Cu/XLPE/PVC/STA/PVC 600/1000 V armoured power cable (FR)	ZR-YJV22 0.6/1 kV · 3×50+2×25	B · Y22	130
56	Power	ZR-YJV22-0.6/1 kV, 3x70+2x35	Cu/XLPE/PVC/STA/PVC 600/1000 V armoured power cable (FR)	ZR-YJV22 0.6/1 kV · 3×70+2×35	B · Y22	250
57	Power	ZR-YJV22-0.6/1kV-3x35+2x16	Cu/XLPE/PVC/STA/PVC 600/1000 V armoured power cable (FR)	ZR-YJV22 0.6/1 kV · 3×35+2×16	B · Y22	280
58	Power	ZR-YJV22-0.6/1kV-3x50+2x25	Cu/XLPE/PVC/STA/PVC 600/1000 V armoured power cable (FR)	ZR-YJV22 0.6/1 kV · 3×50+2×25	B · Y22	280
59	Power	ZR-YJV22-0.6/1kV-5x16	Cu/XLPE/PVC/STA/PVC 600/1000 V armoured power cable (FR)	ZR-YJV22 0.6/1 kV · 5×16	B · Y22	240
60	Power	ZR-YJV22-6/6kV-3x95	6.6 kV / 11 kV system XLPE MV cable (unarmoured / armoured)	ZR-YJV22 6/6 kV · 3×95	D · MVX	TBC
61	Power	ZR-YJV22-8.7/15kV-3x50	6.6 kV / 11 kV system XLPE MV cable (unarmoured / armoured)	ZR-YJV22 8.7/15 kV · 3×50	D · MVX	170
62	Power	ZR-YJV22-8.7/15kV-3x70	6.6 kV / 11 kV system XLPE MV cable (unarmoured / armoured)	ZR-YJV22 8.7/15 kV · 3×70	D · MVX	400
		61 line items			Total	36,071 + TBC

FAMILY A · YJV

03 ZR-YJV 0.6/1 kV

Flame-retardant Cu/XLPE/PVC power cable, unarmoured

FC-TDS-YJV-2026-CF31

Items 25, 27, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49

Total 11,851 m

The general-purpose 600/1000 V distribution cable of the schedule — fixed installation indoors, on cable ladder/tray, in ducts and, where mechanical protection is not required, direct in ground. Single-core 1×95 and 1×150 mm² are supplied for transformer/panel tails. The lighting circuit line (item 25) is offered in the same construction, 3×2.5 mm².

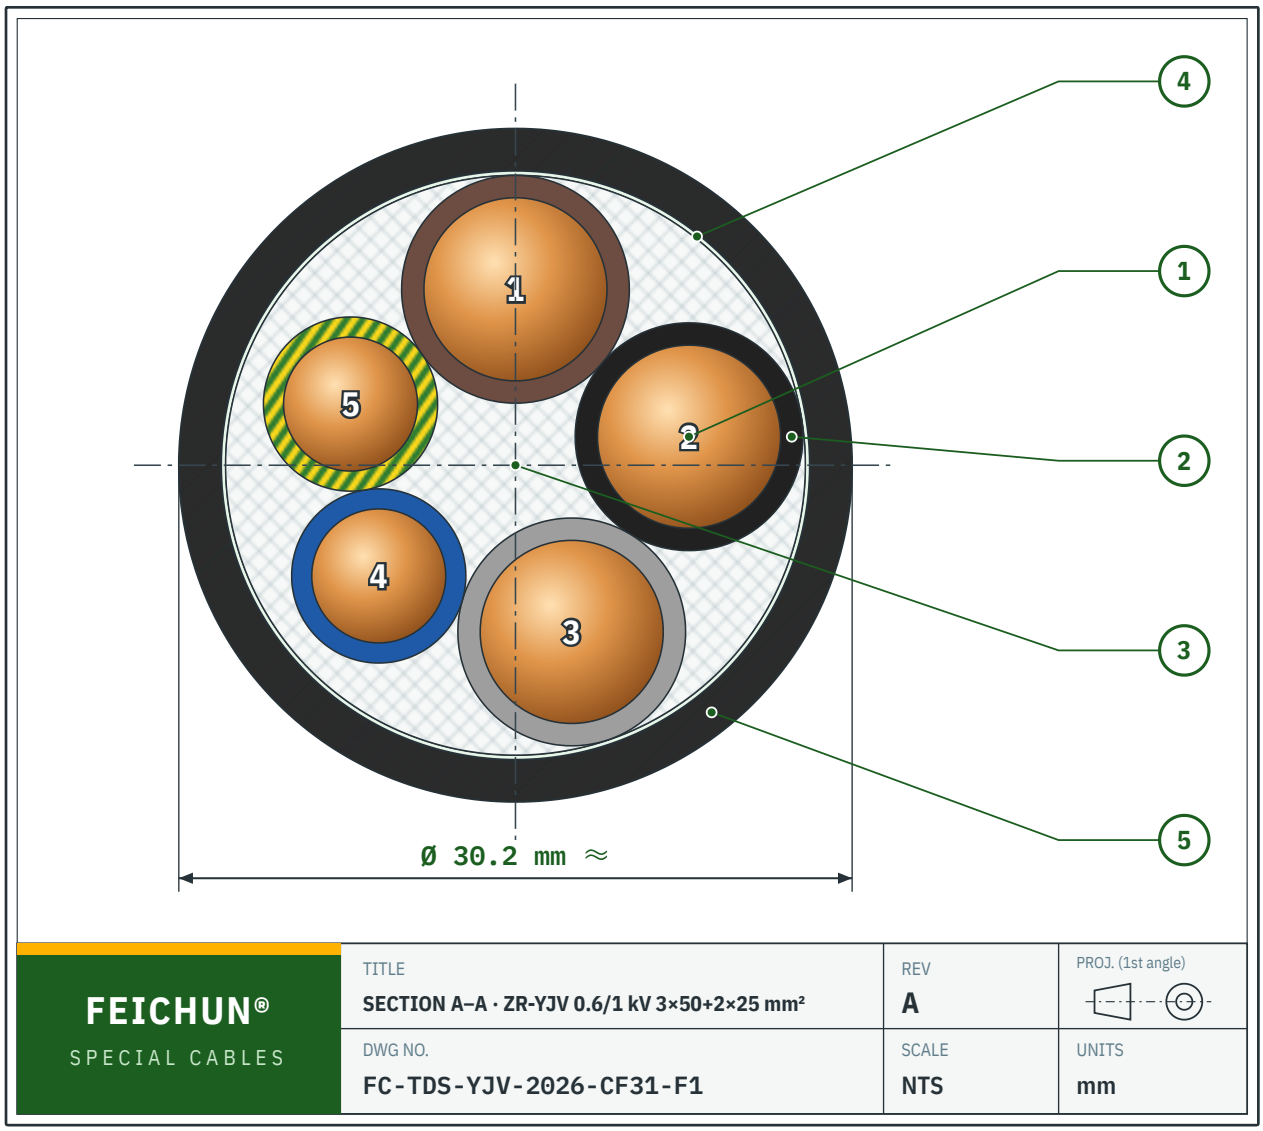


Fig. A-1 · Representative section, 3×50+2×25 mm² (items 32, 40 — 2,780 m). Cores numbered 1–5: L1 · L2 · L3 · N · PE.

Pos.	Element	Material / specification
1	**Conductor**	Plain annealed copper, IEC 60228 / GB/T 3956 Class 2, circular stranded; compacted ≥ 16 mm²
2	**Insulation**	XLPE, 90 °C, IEC 60502-1 thickness; core identification per §12
3	**Filler**	Non-hygroscopic flame-retardant PP yarn / LS0H filler, round lay-up
4	**Binder**	Flame-retardant non-woven polyester tape, overlapped
5	**Outer sheath**	Flame-retardant PVC type ST2, black, UV-stabilised; embossed marking

RATED VOLTAGE U_0/U (U_m) 0.6/1 kV (1.2 kV)	**ROUTINE TEST VOLTAGE** 3.5 kV AC, 5 min
CONDUCTOR TEMPERATURE 90 °C continuous · 250 °C short circuit (≤ 5 s)	**INSTALLATION TEMPERATURE** ≥ 0 °C (cable and ambient)
MIN. BENDING RADIUS (INSTALLATION) Multicore 15 × OD · single-core 20 × OD	**FLAME RETARDANCE** GB/T 18380.33 Cat. C ≡ IEC 60332-3-24; single cable IEC 60332-1-2
DESIGN STANDARD GB/T 12706.1-2020 (IEC 60502-1 MOD)	**SA CROSS-REFERENCE** SANS 1507-4 construction family · SANS 10142-1 / SANS 10198 installation

Client items	Size	Ph. cond. Ø mm	Ins. t mm (ph / N-PE)	Sheath t mm	OD ≈ mm	Mass ≈ kg/km	R_{20} max Ω/km (ph)	Amp. air / ground A	3-ph ΔU mV/A/m	I_k 1 s kA	Min. bend R mm	Qty m
27	**1×95**	11.6	1.1	1.5	**17.1**	1,015	0.193	342 / 238	0.47	13.6	342	10
30, 37	**1×150**	14.5	1.4	1.6	**20.8**	1,570	0.124	464 / 300	0.33	21.4	416	11
25	**3×2.5**	2.0	0.7	1.8	**11.3**	175	7.41	32 / 24	16.36	0.4	170	250
35, 43	**4×2.5**	2.0	0.7	1.8	**12.2**	210	7.41	32 / 24	16.36	0.4	183	2,500
46	**4×4**	2.5	0.7	1.8	**13.5**	285	4.61	42 / 31	10.18	0.6	203	130
47	**4×6**	3.1	0.7	1.8	**14.9**	375	3.08	54 / 39	6.80	0.9	224	40
42	**4×10**	3.9	0.7	1.8	**16.7**	545	1.83	75 / 52	4.04	1.4	250	1,000
48	**5×10**	3.9	0.7	1.8	**18.2**	665	1.83	75 / 52	4.04	1.4	273	800
34	**4×16**	4.8	0.7	1.8	**19.0**	800	1.15	100 / 67	2.54	2.3	285	300
36, 49	**5×16**	4.8	0.7	1.8	**20.7**	980	1.15	100 / 67	2.54	2.3	311	530
31	**3×25+1×16**	6.0	0.9 / 0.7	1.8	**22.3**	1,110	0.727	127 / 86	1.61	3.6	334	1,300
44	**4×25**	6.0	0.9	1.8	**22.8**	1,205	0.727	127 / 86	1.61	3.6	342	760
38	**3×25+2×16**	6.0	0.9 / 0.7	1.8	**24.0**	1,295	0.727	127 / 86	1.61	3.6	360	200
45	**4×35**	7.0	0.9	1.8	**25.2**	1,610	0.524	158 / 103	1.17	5.0	379	960
39	**3×35+2×16**	7.0	0.9 / 0.7	1.8	**26.1**	1,605	0.524	158 / 103	1.17	5.0	391	40
32, 40	**3×50+2×25**	8.2	1.0 / 0.9	1.9	**30.2**	2,280	0.387	192 / 122	0.87	7.1	452	2,780
33	**3×70+2×35**	9.9	1.1 / 0.9	2.1	**35.1**	3,150	0.268	246 / 151	0.61	10.0	527	130
41	**3×95+2×50**	11.6	1.1 / 1.0	2.2	**39.7**	4,235	0.193	298 / 179	0.46	13.6	595	110

Current ratings: IEC 60364-5-52, Cu/XLPE, three loaded conductors — multicore in free air (Method E, 30 °C); in ducts in ground (Method D1, 20 °C, 2.5 K·m/W); single-core in trefoil touching (Method F). ΔU calculated at 90 °C, cos φ ≈ 1 basis, X = 0.08 Ω/km (multicore) / 0.10 Ω/km (single-core trefoil). $I_k = 143 \times S$ (XLPE, 90 → 250 °C).

FAMILY B · Y22

04 ZR-YJV22 0.6/1 kV

Flame-retardant Cu/XLPE/PVC/STA/PVC armoured power cable

FC-TDS-Y22-2026-CF31
Items 54, 55, 56, 57, 58, 59
Total 1,260 m

Armoured version for direct burial, trenches and areas exposed to mechanical damage. The double steel-tape armour (suffix “22”) gives crush and impact protection and acts as a protective earth path where bonded at both ends.

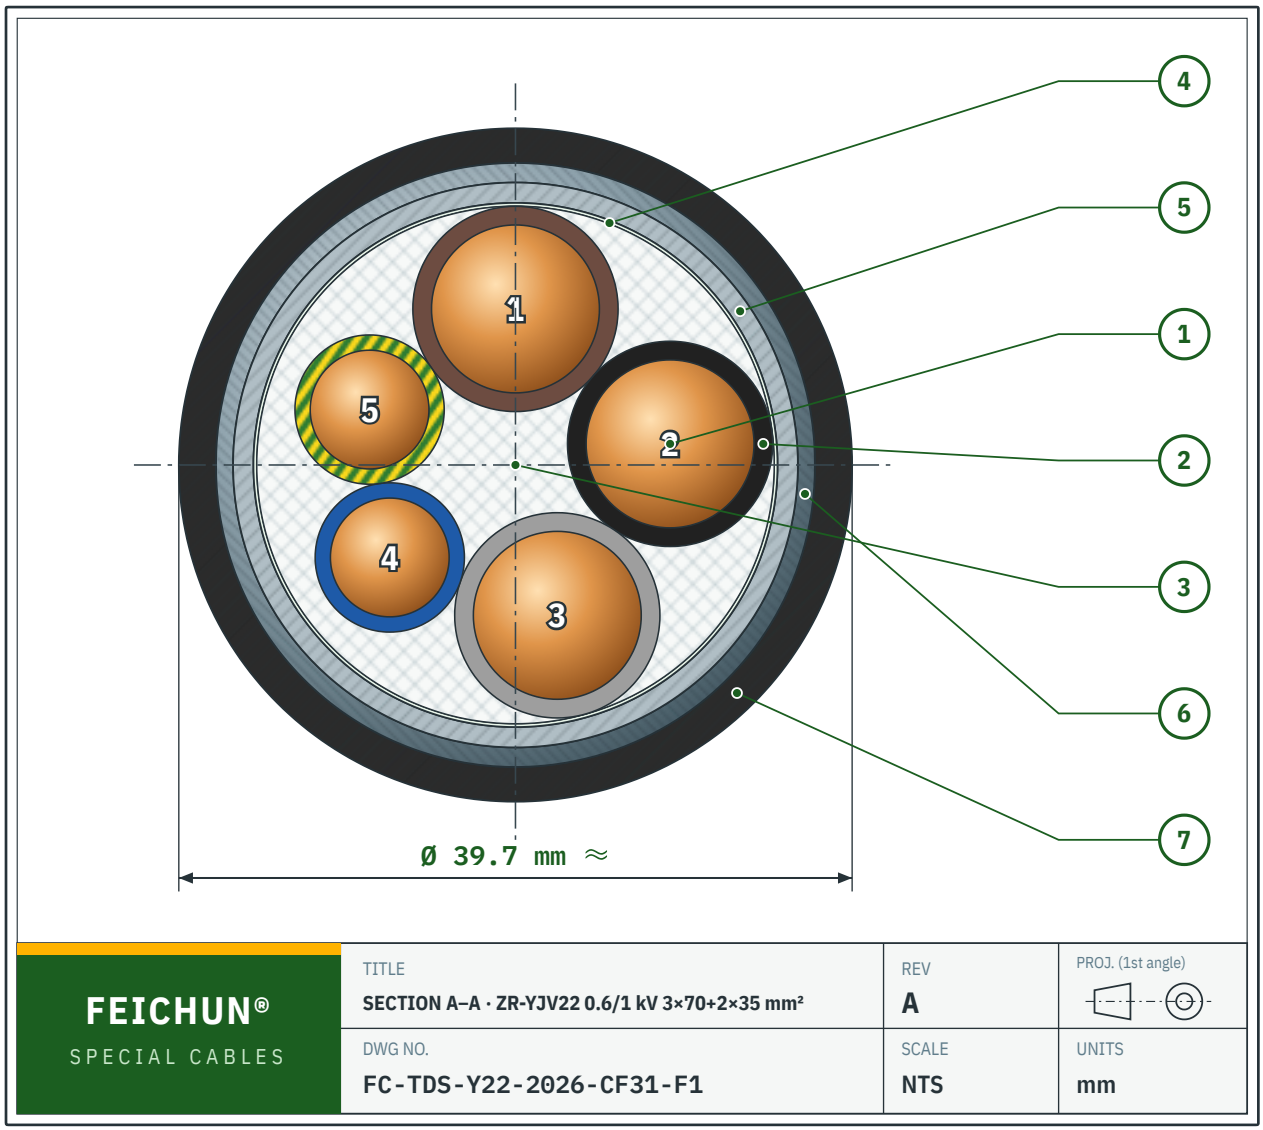


Fig. B-1 · Representative section, 3×70+2×35 mm² (item 56 — 250 m). Cores 1–5: L1 · L2 · L3 · N · PE.

Pos.	Element	Material / specification
1	**Conductor**	Plain annealed copper, Class 2, circular stranded/compacted
2	**Insulation**	XLPE, 90 °C, colour-coded
3	**Filler**	Non-hygroscopic flame-retardant filler
4	**Binder**	Non-woven polyester tape
5	**Inner covering**	Extruded PVC bedding, IEC 60502-1 cl. 12
6	**Armour**	Double galvanised steel tape (STA), gap-wound, 2nd tape covers gaps of 1st
7	**Outer sheath**	Flame-retardant PVC type ST2, black, UV-stabilised

RATED VOLTAGE U_0/U (U_m) 0.6/1 kV (1.2 kV)	**ROUTINE TEST VOLTAGE** 3.5 kV AC, 5 min
CONDUCTOR TEMPERATURE 90 °C continuous · 250 °C short circuit (≤ 5 s)	**MIN. BENDING RADIUS (INSTALLATION)** 15 × OD
FLAME RETARDANCE IEC 60332-3-24 Cat. C · IEC 60332-1-2	**DESIGN STANDARD** GB/T 12706.1-2020 (IEC 60502-1 MOD)
SA TRADE NOTE Steel-wire armoured (SWA) alternative available as ZR-YJV32 — the usual SANS 1507-4 armour form	**ARMOUR AS EARTH PATH** Armour resistance per IEC 60502-1; supplementary PE core included in all sizes

Client items	Size	Ins. t mm (ph / N-PE)	Inner cov. mm	STA mm	Sheath t mm	OD ≈ mm	Mass ≈ kg/km	R_{20} max Ω/km	Amp. air / ground A	3-ph ΔU mV/A/m	I_k 1 s kA	Min. bend R mm	Qty m
59	**5×16**	0.7	1.0	2 × 0.2	1.8	**23.5**	1,280	1.15	100 / 67	2.54	2.3	353	240
54	**3×25+2×16**	0.9 / 0.7	1.0	2 × 0.2	1.8	**26.8**	1,645	0.727	127 / 86	1.61	3.6	402	80
57	**3×35+2×16**	0.9 / 0.7	1.0	2 × 0.2	1.9	**29.1**	2,000	0.524	158 / 103	1.17	5.0	436	280
55, 58	**3×50+2×25**	1.0 / 0.9	1.2	2 × 0.2	2.0	**33.6**	2,770	0.387	192 / 122	0.87	7.1	503	410
56	**3×70+2×35**	1.1 / 0.9	1.2	2 × 0.5	2.2	**39.7**	4,240	0.268	246 / 151	0.61	10.0	596	250

Ratings and ΔU on the same basis as Family A; armour adds < 2 % derating at these sizes, neglected.

FAMILY C · VFD

05 ZR-BPYJV 0.6/1 kV

Flame-retardant symmetrical VSD/VFD power cable, copper-screened

FC-TDS-VFD-2026-CF31

Items 28, 29

Total 170 m

Symmetrical 3+3 construction for motor feeders from variable-speed drives. Balanced earth conductors cancel residual common-mode voltage, reduce bearing currents, and the 360° copper screen contains drive switching noise. Screen to be terminated 360° with EMC glands at both drive and motor ends.

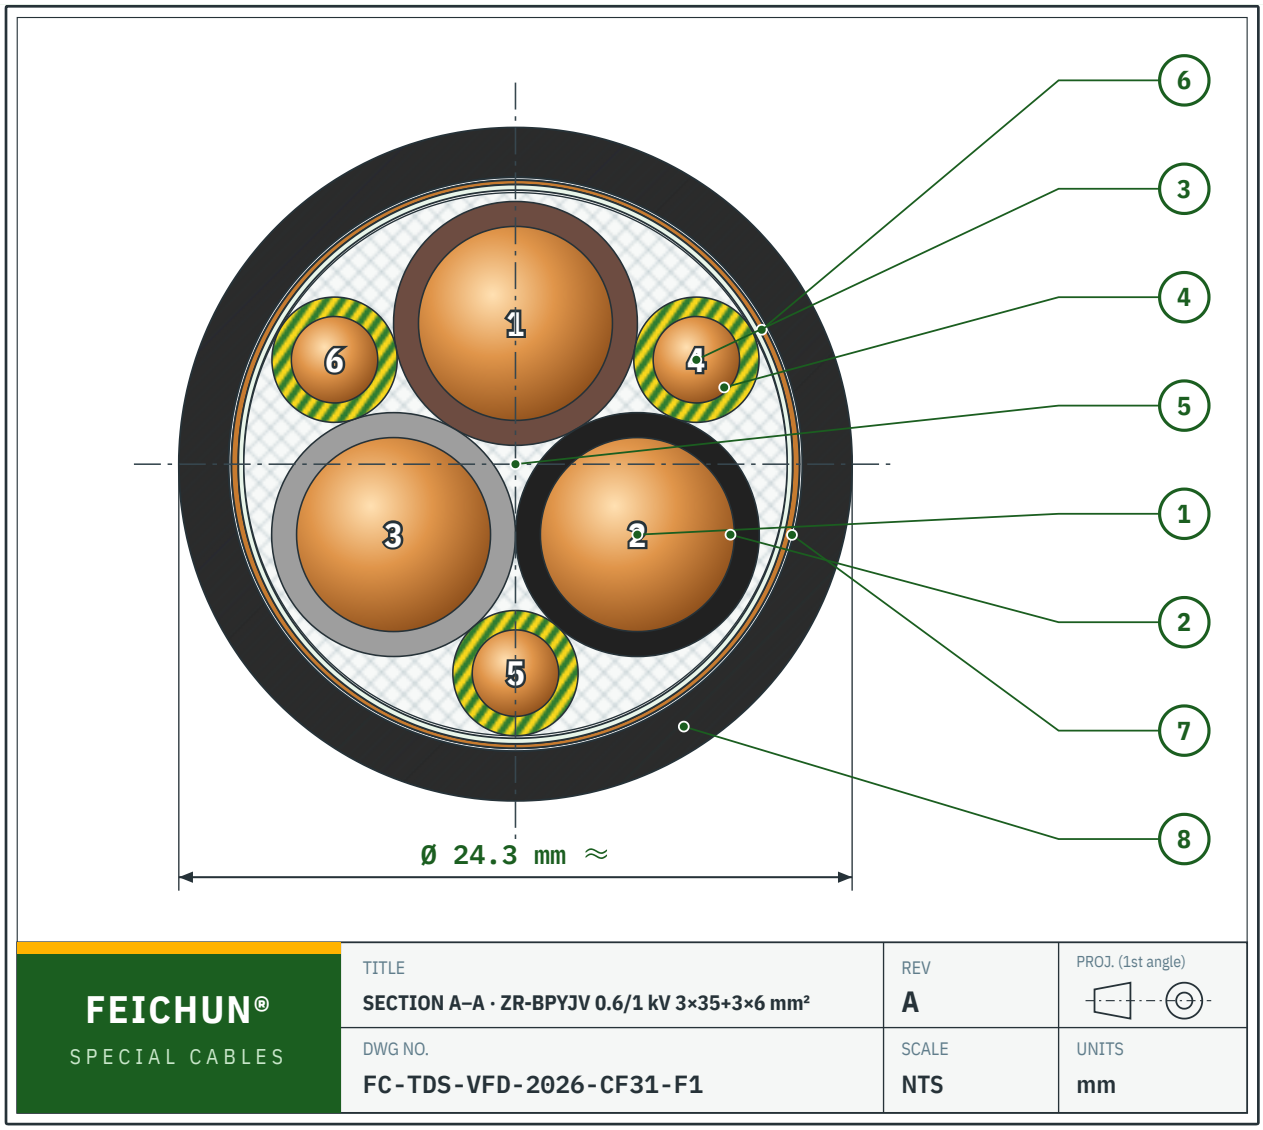


Fig. C-1 · Representative section, 3×35+3×6 mm² (item 29 — 100 m). Cores 1–3 phases, 4–6 split PE.

Pos.	Element	Material / specification
1	**Phase conductor**	Plain annealed copper, Class 2, circular stranded
2	**Phase insulation**	XLPE, low-capacitance, brown / black / grey
3	**Earth conductors**	3 symmetrical PE conductors (total = PE/3 each), Class 2 copper
4	**Earth insulation**	XLPE, green/yellow, laid in outer interstices
5	**Filler**	Non-hygroscopic flame-retardant filler, round lay-up
6	**Overall screen**	Copper tape 0.10 mm, helically overlapped ≥ 20 %; Cu-wire braid option for EMC class C2
7	**Separator**	Polyester tape
8	**Outer sheath**	Flame-retardant PVC type ST2, black

RATED VOLTAGE U_0/U (U_m) 0.6/1 kV (1.2 kV)	**ROUTINE TEST VOLTAGE** 3.5 kV AC, 5 min
CONDUCTOR TEMPERATURE 90 °C continuous · 250 °C short circuit	**SCREEN TRANSFER IMPEDANCE** ≤ 100 mΩ/m at 30 MHz (tape); ≤ 10 mΩ/m with braid option
MIN. BENDING RADIUS 15 × OD (installation), 10 × OD final position	**FLAME RETARDANCE** IEC 60332-3-24 Cat. C · IEC 60332-1-2
DESIGN STANDARD GB/T 12706.1-2020; EMC practice per IEC 61800-3 / IEC 60034-25	**SA TRADE TERM** VSD cable (screened, symmetrical earth)

Client items	Size	Ins. t mm (ph / PE)	Cu screen mm	Sheath t mm	OD ≈ mm	Mass ≈ kg/km	R_{20} max Ω/km (ph / PE)	Amp. air / ground A	I_k 1 s kA	Min. bend R mm	Qty m
28	**3×25+3×4**	0.9 / 0.7	0.10 overlap ≥ 20 %	1.8	**21.9**	1,125	0.727 / 4.61	127 / 86	3.6	329	70
29	**3×35+3×6**	0.9 / 0.7	0.10 overlap ≥ 20 %	1.8	**24.3**	1,500	0.524 / 3.08	158 / 103	5.0	364	100

FAMILY D · MVX

06 ZR-YJV / ZR-YJV22 6/6 kV · 8.7/15 kV

Flame-retardant Cu/XLPE MV power cable, Cu-tape screened

FC-TDS-MVX-2026-CF31

Items 50, 51, 52, 53, 60, 61, 62

Total 850 + TBC m

Medium-voltage feeders. 6/6 kV (U_m 7.2 kV) suits 6.6 kV systems; 8.7/15 kV (U_m 17.5 kV) suits 11 kV systems including those with earth-fault clearance > 1 min (category C), giving margin over the 6.35/11 kV grade. Triple extrusion with dry curing keeps the semicon/XLPE interfaces void-free and partial discharge below 10 pC.

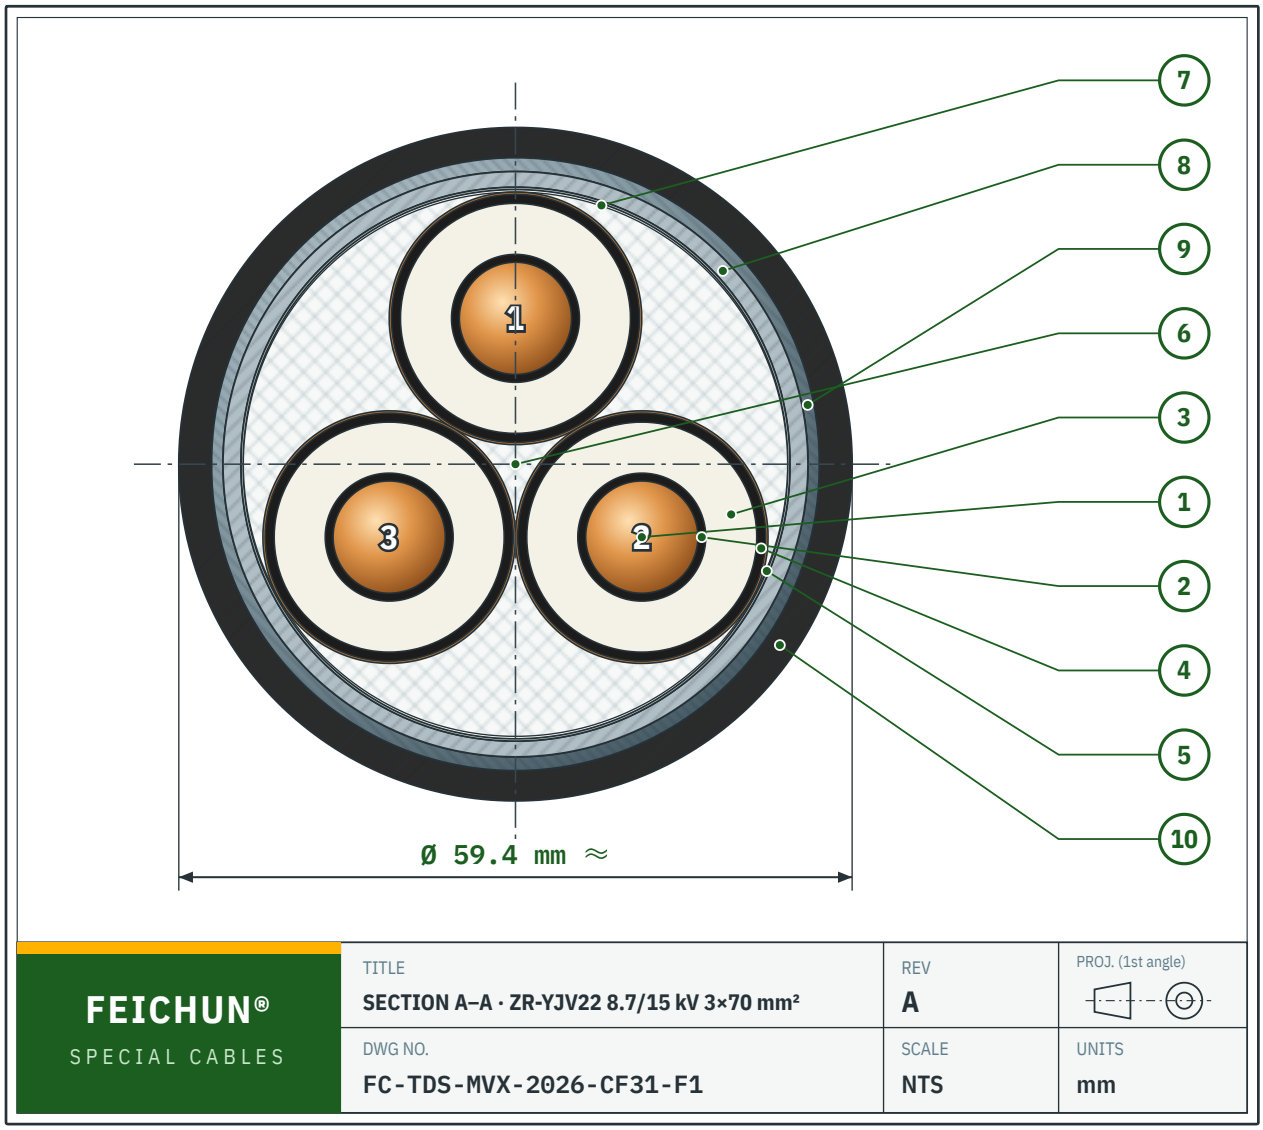


Fig. D-1 · Representative section, ZR-YJV22 8.7/15 kV 3×70 mm² (item 62 — 400 m). Cores 1–3 = phases L1 · L2 · L3.

Pos.	Element	Material / specification
1	**Conductor**	Plain annealed copper, Class 2, circular compacted, longitudinally dry
2	**Conductor screen**	Extruded semi-conducting compound
3	**Insulation**	XLPE, dry-cured, triple-extruded (CCV); 3.4 mm (6/6 kV) · 4.5 mm (8.7/15 kV)
4	**Insulation screen**	Extruded semi-conducting compound, strippable (cold-strip)
5	**Metallic screen**	Annealed copper tape 0.10 mm, helically overlapped ≥ 15 %, per core
6	**Filler**	Non-hygroscopic flame-retardant PP filler
7	**Binder**	Non-woven tape
8	**Inner covering**	Extruded PVC (YJV22) — wrapped tape bedding for YJV
9	**Armour**	Double galvanised steel tape 2 × 0.5 mm (YJV22 only)
10	**Outer sheath**	Flame-retardant PVC type ST2, red or black, embossed

RATED VOLTAGE 6/6 kV (U_m 7.2 kV) · 8.7/15 kV (U_m 17.5 kV)	**ROUTINE AC TEST** 6/6 kV: 21 kV, 5 min · 8.7/15 kV: 30.5 kV, 5 min (3.5 U_0)
PARTIAL DISCHARGE ≤ 10 pC at 1.73 U_0 (routine, each length)	**LIGHTNING IMPULSE (TYPE)** 6/6 kV: 75 kV · 8.7/15 kV: 95 kV
CONDUCTOR TEMPERATURE 90 °C continuous · 250 °C short circuit (≤ 5 s)	**MIN. BENDING RADIUS** 15 × OD (3-core)
DESIGN STANDARD GB/T 12706.2/.3-2020 (IEC 60502-2 MOD)	**SA CROSS-REFERENCE** SANS 1339 XLPE MV cable family · SANS 10198 installation

Client items	Type	U_0/U	Size	Ins. t mm	Inner cov. / STA mm	Sheath t mm	OD ≈ mm	Mass ≈ kg/km	R_{20} max Ω/km	R_{90} AC ≈ Ω/km	C ≈ µF/km	X ≈ Ω/km	Amp. buried / air A	I_t 1 s kA	Min. bend R mm	Qty m
50	ZR-YJV	6/6 kV	**3×95**	3.4	—	2.7	**52.8**	4,525	0.193	0.249	0.330	0.099	302 / 335	13.6	792	200
60	ZR-YJV22	6/6 kV	**3×95**	3.4	1.6 / 2×0.5	2.8	**58.2**	6,260	0.193	0.249	0.330	0.099	302 / 335	13.6	873	TBC
53	ZR-YJV	8.7/15 kV	**3×50**	4.5	—	2.6	**50.0**	3,230	0.387	0.498	0.210	0.117	202 / 218	7.1	750	25
51	ZR-YJV	8.7/15 kV	**3×120**	4.5	—	2.9	**60.9**	5,815	0.153	0.201	0.286	0.101	337 / 376	17.2	914	50
52	ZR-YJV	8.7/15 kV	**3×240**	4.5	—	3.3	**73.4**	9,935	0.0754	0.102	0.371	0.092	482 / 552	34.3	1,100	5
61	ZR-YJV22	8.7/15 kV	**3×50**	4.5	1.4 / 2×0.5	2.7	**55.0**	4,820	0.387	0.498	0.210	0.117	202 / 218	7.1	825	170
62	ZR-YJV22	8.7/15 kV	**3×70**	4.5	1.6 / 2×0.5	2.9	**59.4**	5,805	0.268	0.345	0.237	0.110	247 / 271	10.0	892	400

Current ratings indicative from IEC 60502-2 Annex B reference conditions: one 3-core cable direct buried at 0.8 m, 20 °C ground, 1.5 K·m/W; in free air 30 °C, shaded. Screen short-circuit capability (copper tape) is sized to the earth-fault level on request — a copper wire screen (e.g. 25 mm²) can be fitted where the network earth-fault current demands it.

FAMILY E · KVP

07 ZR-KVVP 450/750 V

Flame-retardant PVC multicore control cable, copper-braid screened

FC-TDS-KVP-2026-CF31

Items 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22, 23, 24

Total 14,410 + TBC m

Instrumentation, interlock and motor-control circuits between MCCs, field devices and PLC panels. The copper-wire braid gives low transfer impedance against drive and switching interference; earth the braid at the panel end (or both ends for HF noise, per site EMC philosophy).

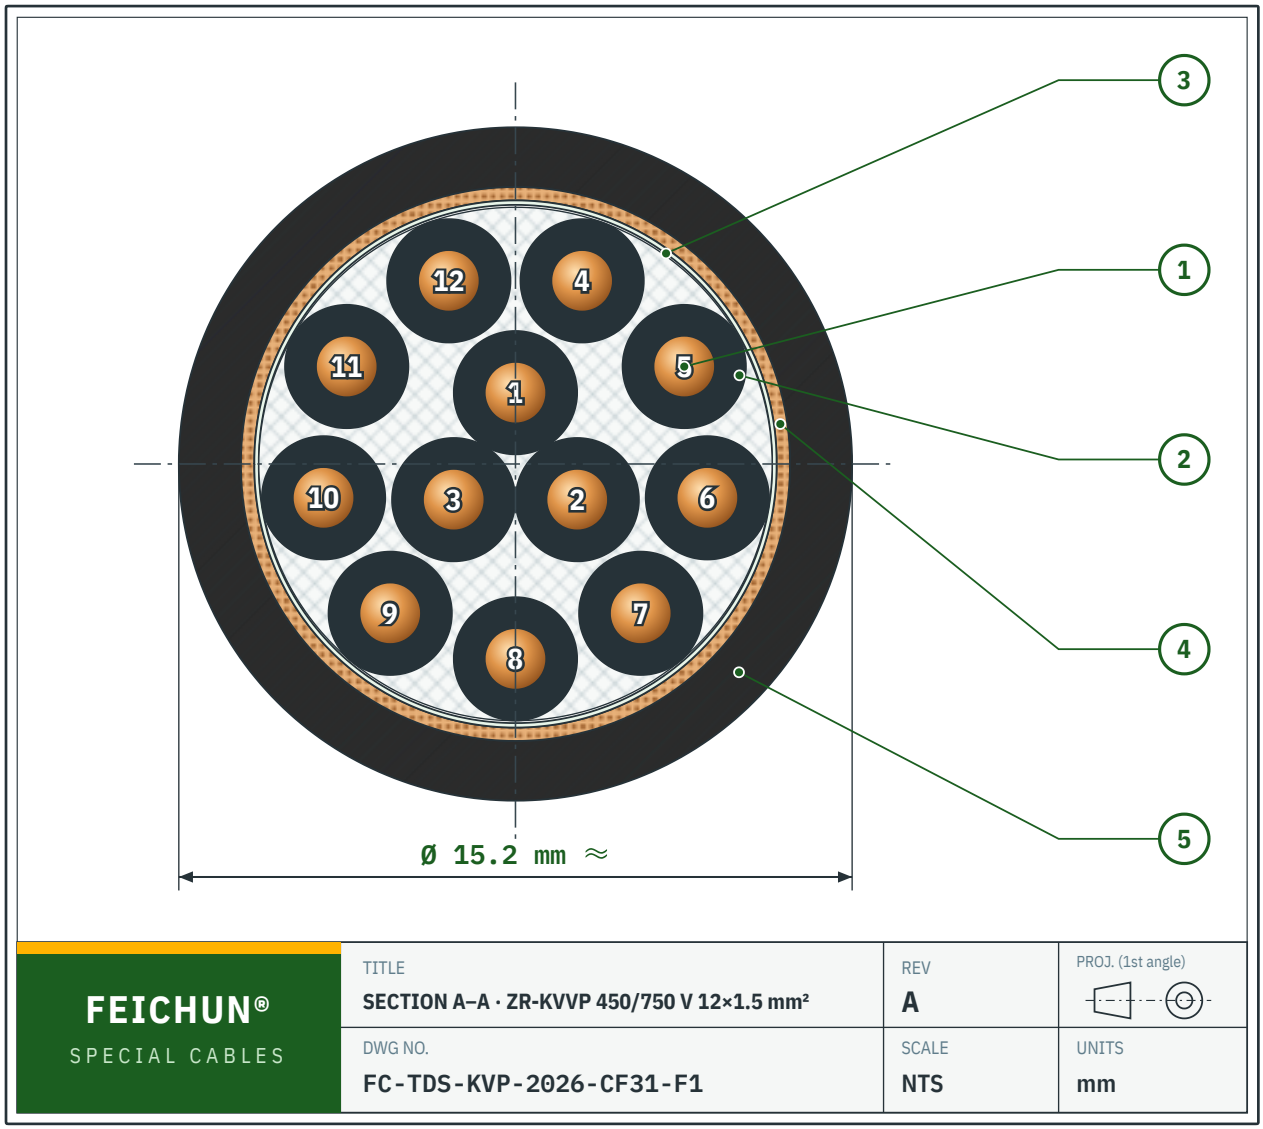


Fig. E-1 · Representative section, 12×1.5 mm² (items 11, 17 — 2,160 m). Cores numbered 1–12 as printed.

Pos.	Element	Material / specification
1	**Conductor**	Plain annealed copper, Class 1 solid (Class 2 stranded on request)
2	**Insulation**	PVC type PVC/C, 70 °C; black with white printed numerals 1…n + GNYE option
3	**Binder**	Polyester tape over cabled cores (fillers where required)
4	**Screen**	Plain annealed copper wire braid, Ø 0.15 mm, optical coverage ≥ 80 %
5	**Outer sheath**	Flame-retardant PVC type ST1, black

RATED VOLTAGE U_0/U 450/750 V	**ROUTINE TEST VOLTAGE** 3.0 kV AC, 5 min
CONDUCTOR TEMPERATURE 70 °C continuous · 160 °C short circuit	**INSULATION RESISTANCE** ≥ 0.011 MΩ·km (1.5 mm²) / ≥ 0.010 MΩ·km (2.5 mm²) at 70 °C
MIN. BENDING RADIUS 10 × OD (installation)	**FLAME RETARDANCE** IEC 60332-3-24 Cat. C · IEC 60332-1-2
DESIGN STANDARD GB/T 9330-2020 (KVVP) · conductors IEC 60228	**SA TRADE TERM** Screened multicore control cable (PVC/braid/PVC)

Client items	Size	Cond. Ø mm	Ins. t mm	Braid	Sheath t mm	OD ≈ mm	Mass ≈ kg/km	R_{20} max Ω/km	Amp. air (3 loaded) A	Min. bend R mm	Qty m
12, 19	**2×1.5**	1.38	0.7	0.15 wire, ≥ 80 %	1.2	**8.8**	135	12.1	18	88	520
14, 22	**4×1.5**	1.38	0.7	0.15 wire, ≥ 80 %	1.3	**10.1**	190	12.1	18	101	3,450
16	**10×1.5**	1.38	0.7	0.15 wire, ≥ 80 %	1.4	**14.7**	385	12.1	18	147	750
11, 17	**12×1.5**	1.38	0.7	0.15 wire, ≥ 80 %	1.4	**15.2**	430	12.1	18	152	2,160
13, 20	**3×2.5**	1.78	0.8	0.15 wire, ≥ 80 %	1.3	**10.7**	215	7.41	25	107	340
15, 23	**4×2.5**	1.78	0.8	0.15 wire, ≥ 80 %	1.3	**11.6**	260	7.41	25	116	6,140
24	**6×2.5**	1.78	0.8	0.15 wire, ≥ 80 %	1.4	**13.7**	360	7.41	25	137	1,050
18	**12×2.5**	1.78	0.8	0.15 wire, ≥ 80 %	1.5	**17.8**	620	7.41	25	178	TBC

FAMILY F · RNF

08 FC-FLX™ H07RN-F 450/750 V

Heavy-duty rubber flexible cable (cabtyre)

FC-TDS-RNF-2026-CF31
Items 7, 8, 9, 10
Total 2,180 + TBC m

The “cabtyre” lines of the schedule. Offered as harmonised H07RN-F heavy-duty rubber flexible cable — FeiChun’s core competence — for portable equipment, temporary site supplies, pumps and outdoor/wet locations where PVC flex would stiffen or crack.

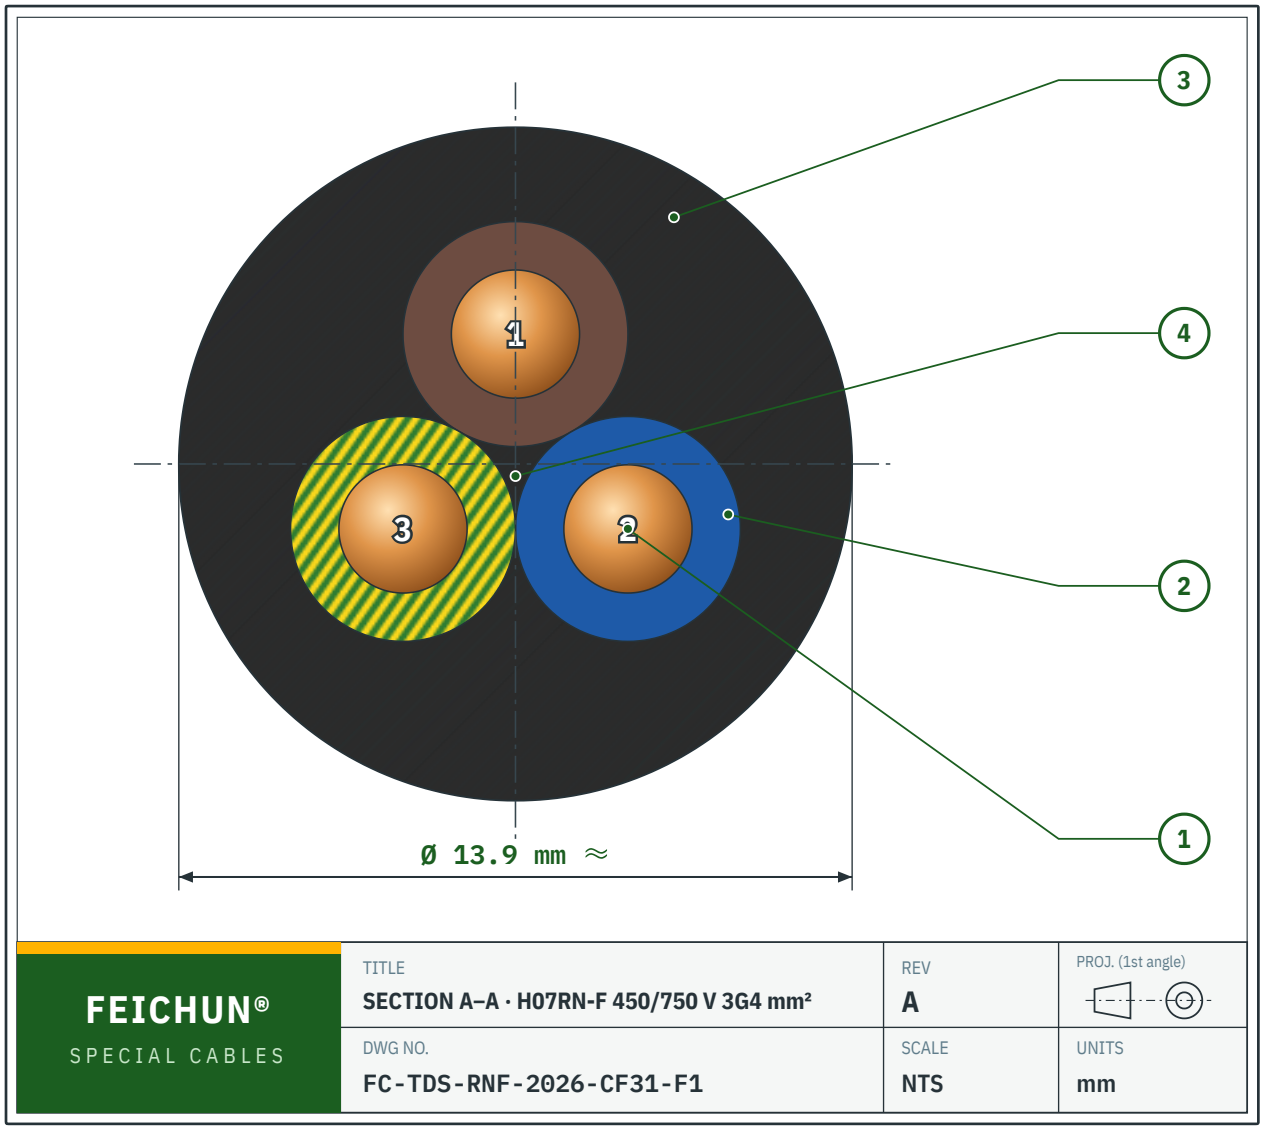


Fig. F-1 · Representative section, 3G4 mm² (items 9, 10 — 780 m). Cores 1 = L (brown), 2 = N (blue), 3 = PE (green/yellow).

Pos.	Element	Material / specification
1	**Conductor**	Plain annealed copper, IEC 60228 Class 5 fine-stranded
2	**Insulation**	Rubber compound EI4 (EPR), 90 °C rated; brown · blue · green/yellow
3	**Outer sheath**	Heavy-duty polychloroprene EM2, black — oil, ozone, UV and weather resistant
4	**Interstices**	Filled by sheath compound (extruded-filling); separator tape where required

RATED VOLTAGE U_0/U 450/750 V (fixed protected: 0.6/1 kV)	**ROUTINE TEST VOLTAGE** 2.5 kV AC, 5 min
CONDUCTOR TEMPERATURE 60 °C continuous (EN 50525-2-21 rating) · 200 °C short circuit	**TEMPERATURE RANGE** Flexing –25 °C … +60 °C · fixed –40 °C
MIN. BENDING RADIUS Fixed 4 × OD · flexing 6 × OD	**FLAME RETARDANCE** IEC 60332-1-2
DESIGN STANDARD EN 50525-2-21 · IEC 60245-4 (60245 IEC 66)	**RESISTANCE** Oil EN 60811-404 · ozone EN 60811-403 · UV

Client items	Size	Conductor	Ins. t mm	Sheath t mm	OD ≈ mm (EN range)	Mass ≈ kg/km	R_{20} max Ω/km	Amp. air (2 loaded) A	Bend R fixed / flex mm	Qty m
7, 8	**3G2.5**	Class 5	0.9	1.8	**12.1** (10.9–14.0)	225	7.98	30	48 / 73	1,400 +TBC
9, 10	**3G4**	Class 5	1.0	1.9	**13.9** (12.7–16.2)	310	4.95	41	56 / 84	780

Ampacity per VDE 0298-4 Table 11, single cable in free air, 30 °C.

FAMILY G · BCE

09 FC-BCE 1×150 mm²

Bare stranded copper earth / lightning-protection conductor

FC-TDS-BCE-2026-CF31
Items 5, 6, 26
Total 3,400 m

Bare earth conductor for substation earth grids, equipotential bonding rings, structure earthing and the lightning-protection down-conductor/earth-termination line (item 26). Concentric-lay 37-wire construction keeps the conductor round and stable when bent around foundations and exothermically welded.

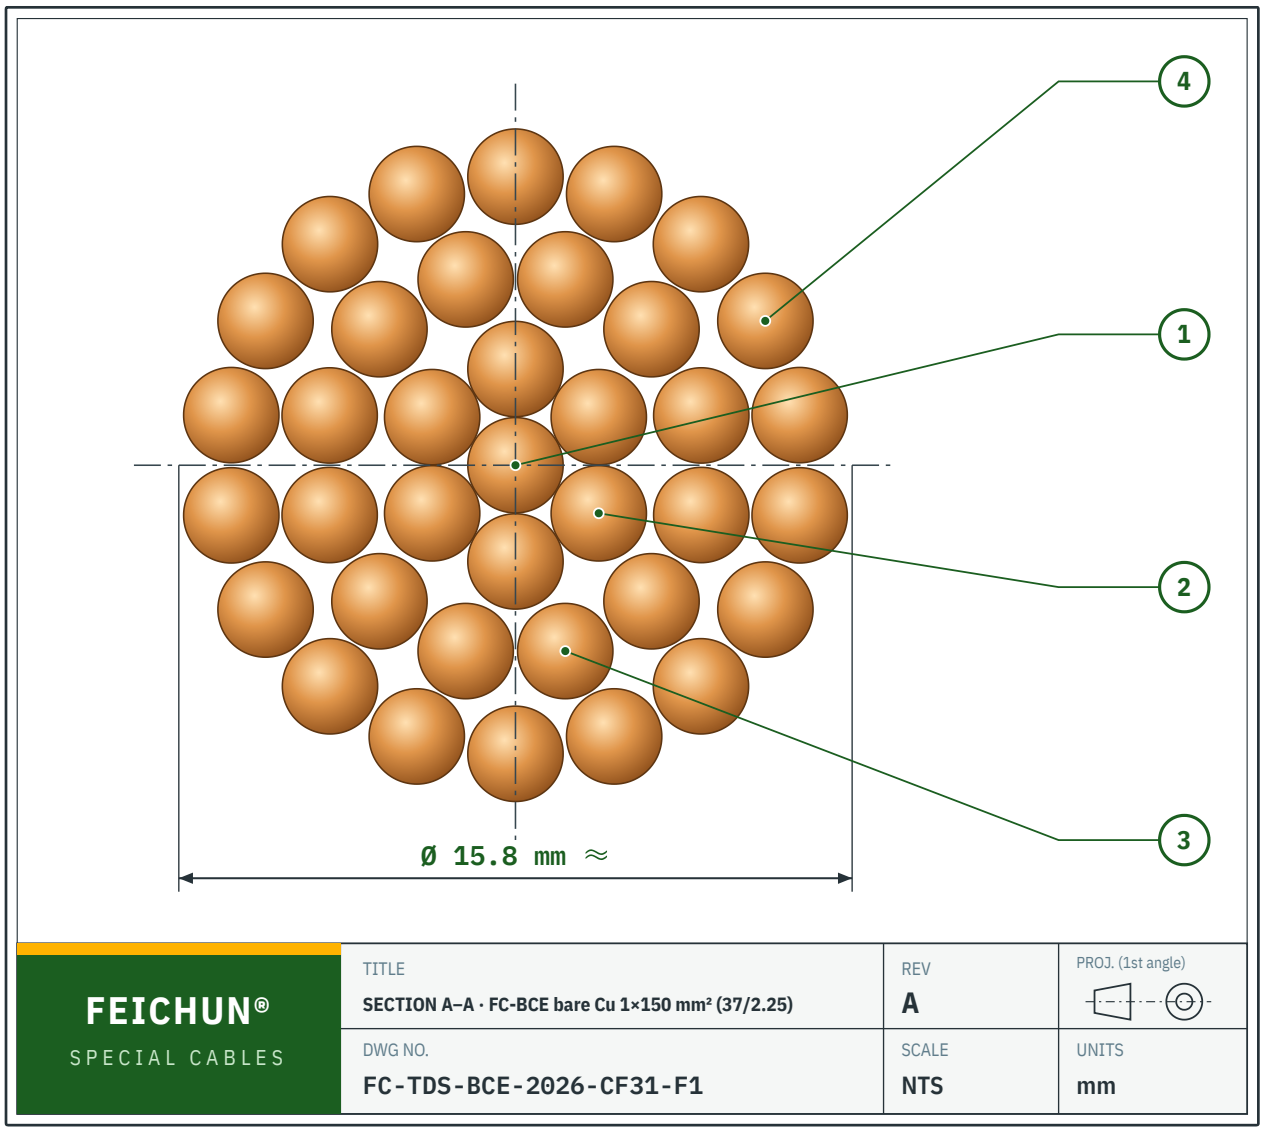


Fig. G-1 · Section, bare Cu 1×150 mm², 37/2.25 mm concentric lay (items 5, 6, 26).

Pos.	Element	Material / specification
1	**Centre wire**	Annealed copper, Ø 2.25 mm
2	**1st layer**	6 × Ø 2.25 mm, left-hand lay
3	**2nd layer**	12 × Ø 2.25 mm, right-hand lay
4	**3rd layer**	18 × Ø 2.25 mm, right-hand (outer) lay

MATERIAL Annealed copper (TR) ≥ 99.9 % Cu; hard-drawn (TJ) on request	**SHORT-TIME CURRENT 1 S** 23.9 kA (k = 159, 200 °C) · 34.2 kA (k = 228, 500 °C) — IEC 60364-5-54
TINNED OPTION Tinned wires for corrosive soils / coastal sites	**DESIGN STANDARD** IEC 60228 / GB/T 3956 Class 2 · wires GB/T 3953
LIGHTNING PROTECTION Exceeds IEC 62305-3 minimum 50 mm² Cu for earth-termination	**DELIVERY** Steel-wooden drums, lengths to project schedule

Client items	Size	Construction	Calc. area mm²	OD ≈ mm	Mass ≈ kg/km	R₂₀ max Ω/km	Breaking load ≈ kN	Qty m
5, 6, 26	**1×150**	37 / 2.25 mm	147.1	15.75	1,355	0.124	≥ 29 (annealed) · ≥ 52 (hard-drawn)	3,400

FAMILY H · ATE

10 FC-ATE anti-theft earth conductor

Copper-clad steel (CCS) stranded earthing conductor, anti-theft

FC-TDS-ATE-2026-CF31
Items 1, 2, 3, 4
Total 1,950 m

Copper theft from earthing networks is a serious operational risk in South Africa. The FC-ATE conductor uses copper-clad steel: the steel core removes scrap value and adds tensile strength, while the bonded copper skin gives copper-grade corrosion behaviour and exothermic-weld compatibility. A green/yellow PVC or HDPE jacket printed “NO SCRAP VALUE — COPPER CLAD STEEL” is available.

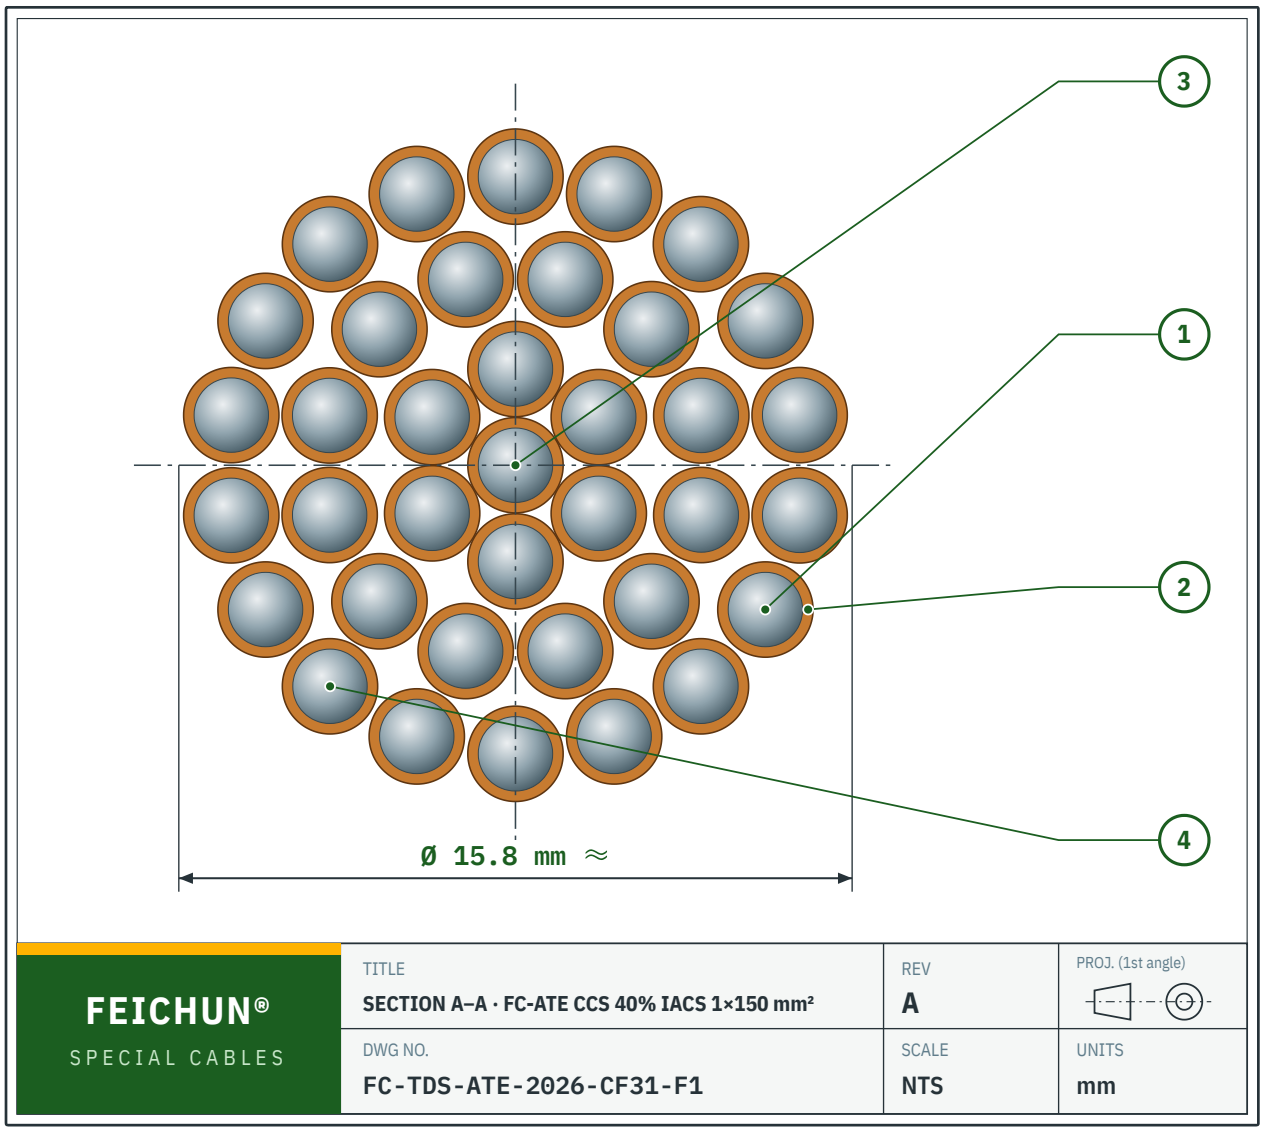


Fig. H-1 · Section, FC-ATE CCS 40 % IACS 1×150 mm², 37/2.25 mm (items 1, 3). Each wire: steel core + bonded copper.

Pos.	Element	Material / specification
1	**Steel core**	Low-carbon steel wire, cold-drawn
2	**Copper cladding**	Metallurgically bonded copper layer ≥ 0.25 mm (GB/T 21698); continuous, pore-free
3	**Centre wire**	CCS wire Ø 2.25 mm (Ø 2.14 mm for 70 mm²)
4	**Concentric layers**	6 + 12 + 18 CCS wires (150 mm²) · 6 + 12 (70 mm²); outer layer right-hand

CONDUCTIVITY GRADE 40 % IACS standard · 30 % IACS option	**COPPER THICKNESS** ≥ 0.25 mm, bonded (no galvanic interface)
COPPER-EQUIVALENT CONDUCTANCE 1×150 CCS 40 % ≈ 60 mm² Cu · 1×70 CCS 40 % ≈ 27 mm² Cu	**SIZING TO CU EQUIVALENCE** Where the earthing study requires 150 / 70 mm² Cu conductance, CCS 40 % is offered at ≈ 375 / 175 mm² nominal
DESIGN STANDARDS GB/T 21698 · ASTM B227 (wire) / ASTM B228 (stranded)	**JOINTING** Exothermic weld or compression lug — same tooling as copper

Client items	Size	Construction	Calc. area mm²	OD ≈ mm	Mass ≈ kg/km	R₂₀ ≈ Ω/km (40 % IACS)	Breaking load ≈ kN	Qty m
1, 3	**1×150**	37 / 2.25 mm CCS	147.1	15.75	1,260	0.302	≥ 59	350
2	**1×70**	19 / 2.14 mm CCS	68.3	10.70	580	0.643	≥ 27	300
4	TBC	per confirmed size	—	—	—	—	—	1,300

11 Testing & quality assurance

ISO 9001 QMS

Test	Category	Families	Requirement	Reference
Conductor DC resistance	Routine	All	≤ max. value at 20 °C as tabulated	IEC 60228 · GB/T 3048.4
AC voltage test	Routine	A B C	3.5 kV, 5 min — no breakdown	IEC 60502-1 cl. 15.3
AC voltage test	Routine	D	21 kV (6/6 kV) · 30.5 kV (8.7/15 kV), 5 min	IEC 60502-2 cl. 16.3
Partial discharge	Routine	D	≤ 10 pC at 1.73 U_0	IEC 60885-3
AC voltage test	Routine	E · F	3.0 kV (KVVP) · 2.5 kV (H07RN-F), 5 min	GB/T 9330 · EN 50525-2-21
Dimensional check (insulation, sheath, OD)	Sample	All	Min. thickness ≥ nominal × 0.9 − 0.1 mm	IEC 60811-201/-202/-203
Hot-set test (XLPE)	Sample	A B C D	Elongation under load ≤ 175 %, permanent ≤ 15 %	IEC 60811-507
Tensile / elongation, ageing	Type	All insulated	Per compound type (XLPE, PVC/C, ST1/ST2, EI4, EM2)	IEC 60811-501 / -401
Flame propagation, bunched	Type	A–E	Category C, char ≤ 2.5 m	IEC 60332-3-24 · GB/T 18380.33
Flame propagation, single cable	Type	A–F	Char end ≥ 50 mm from upper clamp	IEC 60332-1-2
Lightning impulse + heating cycle	Type	D	75 kV / 95 kV, 10 + 10 impulses	IEC 60502-2 cl. 18
Copper-layer thickness & bond	Sample	H	≥ 0.25 mm, no separation after twist/bend	GB/T 21698 · ASTM B227

Routine tests are performed on every delivery length and reported in FeiChun in-house laboratory test reports issued with the shipment. Independent third-party witness or testing can be arranged at the buyer's cost.

12 Core identification, marking & packing

Construction	Standard colours (IEC 60445)	South African option
LV 3-core / 3+1 / 3+2	BN · BK · GY · BU (N) · GNYE (PE)	Red · White · Blue · Black (N) · GNYE
LV 4-core / 5-core	BN · BK · GY · BU · GNYE	Red · White · Blue · Black · GNYE
Single-core	Black insulation	Red / black
MV 3-core	Numbered tape 1 · 2 · 3	Red · White · Blue phase tape
KVVP control	Black, white numerals 1…n	Same + GNYE earth core
H07RN-F 3G	BN · BU · GNYE	As standard

Sheath marking (embossed or ink-jet, ≤ 1 m interval):
`FEICHUN CABLES · ZR-YJV22 0.6/1kV 3×70+2×35mm² · IEC 60502-1 · 2026 · 0001m`
Client tag, purchase-order number or SANS-style descriptors can be added to the legend at no change in lead time.

Packing — non-returnable steel-wooden drums (fumigated, ISPM 15), cable ends sealed with heat-shrink caps; drum label with item no., type, size, length, gross/net mass and drum no. Delivery lengths per schedule line; mixed lines consolidated on shared drums where practical.

13 Schedule lines for client confirmation

The following lines are carried in this data sheet with their construction fixed; the open values below complete the schedule.

Item	Scheduled as	Open point	Action
4	Specification/size not clearly legible in schedule	conductor size not legible in schedule	Confirm size
7	3x2.5	quantity not stated	Confirm metres
18	ZR-KVVP-450/750V, 12x2.5	quantity not stated	Confirm metres
60	ZR-YJV22-6/6kV-3x95	quantity not stated	Confirm metres
21	—	Item number not present in the schedule (sequence runs 20 → 22)	Confirm whether a line is missing

14 Contact & approval

FEICHUN SPECIAL CABLES — TECHNICAL SALES

Anhui FeiChun Special Cable Co., Ltd. (安徽飞纯特种电缆有限公司)
No. 1 Park, Private Science & Technology Park, Hefei ETDZ, Anhui, China
Technical: Tech@feichuncables.com
Mining & heavy industry: mining@feichuncables.com
Zihao Yang: zihao.yang@feichuncables.com
WhatsApp: +86 138 5512 3218
Web: www.feichuncables.com

Prepared — FeiChun Technical Sales	Checked — FeiChun Technical Dept. 安徽飞纯特种电缆有限公司 ANHUI FEICHUN SPECIAL CABLE CO.,LTD.
Client technical review	Client approval / date

INTELLECTUAL PROPERTY & CONFIDENTIALITY NOTICE

This document, its drawings (FC-TDS-YJV-2026-CF31-F1, FC-TDS-Y22-2026-CF31-F1, FC-TDS-VFD-2026-CF31-F1, FC-TDS-MVX-2026-CF31-F1, FC-TDS-KVP-2026-CF31-F1, FC-TDS-RNF-2026-CF31-F1, FC-TDS-BCE-2026-CF31-F1, FC-TDS-ATE-2026-CF31-F1) and data are the property of Anhui FeiChun Special Cable Co., Ltd. and are issued solely for evaluation of the referenced South African project. Reproduction or disclosure to third parties without written consent is prohibited and protected under the Copyright Law of the People's Republic of China, the Anti-Unfair Competition Law of the PRC and the Australian *Copyright Act 1968* (Cth). FC®, FC-FLX™ and the FeiChun logo are trademarks of FeiChun. Third-party designations (GB, IEC, SANS, EN, VDE, ASTM) are cited for technical reference only; FeiChun makes no claim of endorsement by the respective bodies.